


## UVABU

### Plug-to-socket connecting line, WAGO

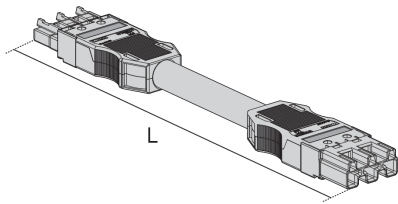

UVABU components are prefabricated connection lines. They consist of a WAGO WINSTA MIDI system connection cable with a plug with 3-pin input and output and a socket. The cables are type H05 VV-F 3G2.5 with a rated voltage/current of 250 V/20 A and a cable cross-section of 2.5 mm<sup>2</sup>.

Products	color			KQ	W
UVABU-S-2.5-100	black	3-polig	3-polig	2,5 mm <sup>2</sup>	0,176 kg
UVABU-S-2.5-400	black	3-polig	3-polig	2,5 mm <sup>2</sup>	0,610 kg
UVABU-S-2.5-600	black	3-polig	3-polig	2,5 mm <sup>2</sup>	0,906 kg
UVABU-S-2.5-800	black	3-polig	3-polig	2,5 mm <sup>2</sup>	1,203 kg
UVABU-W-2.5-100	white	3-polig	3-polig	2,5 mm <sup>2</sup>	0,176 kg
UVABU-W-2.5-400	white	3-polig	3-polig	2,5 mm <sup>2</sup>	0,610 kg
UVABU-W-2.5-600	white	3-polig	3-polig	2,5 mm <sup>2</sup>	0,906 kg
UVABU-W-2.5-800	white	3-polig	3-polig	2,5 mm <sup>2</sup>	1,203 kg

**KQ:**

**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

