


UVB 2

Vertical bend, two sections



UVB 2 components are two-section vertical bends with a separating strip. They are used for the installation of screed-covered duct systems. They are manufactured as a closed rectangular profile with a 90° angle and are mounted on the raw slab with the multi-channel duct sections. The bends are made of sendzimir hot-dip galvanized sheet steel in accordance with DIN EN 10346. The upper and lower parts are permanently connected together at the factory. UVB 2 components have a VDE/TÜV approval according to DIN EN 50085.

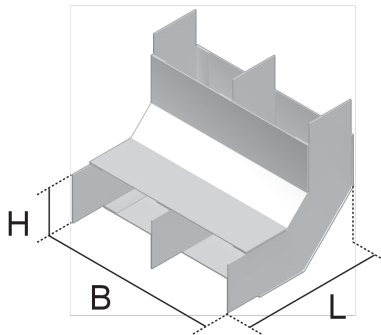

steel, continously hot galvanized/Sendzimir process

Products	H	B	L				W	
UVB 2-28-190S	29 mm	186 mm	132 mm	90 °	0	1	VERTIKAL	0,709 kg
UVB 2-28-250S	29 mm	246 mm	132 mm	90 °	0	1	VERTIKAL	0,867 kg
UVB 2-28-350S	29 mm	346 mm	132 mm	90 °	0	1	VERTIKAL	1,132 kg
UVB 2-38-190S	39 mm	186 mm	132 mm	90 °	0	1	VERTIKAL	0,720 kg
UVB 2-38-250S	39 mm	246 mm	132 mm	90 °	0	1	VERTIKAL	0,871 kg
UVB 2-38-350S	39 mm	346 mm	132 mm	90 °	0	1	VERTIKAL	1,123 kg
UVB 2-48-190S	49 mm	186 mm	132 mm	90 °	0	1	VERTIKAL	0,738 kg
UVB 2-48-250S	49 mm	246 mm	132 mm	90 °	0	1	VERTIKAL	0,881 kg
UVB 2-48-350S	49 mm	346 mm	132 mm	90 °	0	1	VERTIKAL	1,120 kg

H: height
B: width
L: length
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



