


UVB 3

Vertical bend, three sections



UVB 3 components are three-section vertical bends with two separating strips. They are used to install screed-covered duct systems. They are manufactured as a closed rectangular profile with a 90° angle and are mounted on the raw slab with the multi-channel duct sections. The bends are made of sendzimir hot-dip galvanized sheet steel in accordance with DIN EN 10346. The upper and lower parts are permanently connected together at the factory. UVB 3 components have a VDE/TUV approval according to DIN EN 50085.

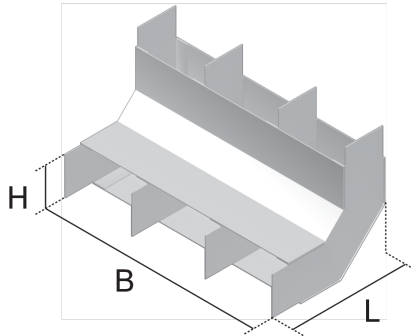

steel, continously hot galvanized/Sendzimir process

Products	H	B	L				W	
UVB 3-28-250S	29 mm	246 mm	132 mm	90 °	0	1	VERTIKAL	0,939 kg
UVB 3-28-350S	29 mm	346 mm	132 mm	90 °	0	1	VERTIKAL	1,204 kg
UVB 3-38-250S	39 mm	246 mm	132 mm	90 °	0	1	VERTIKAL	0,955 kg
UVB 3-38-350S	39 mm	346 mm	132 mm	90 °	0	1	VERTIKAL	1,207 kg
UVB 3-48-250S	49 mm	246 mm	132 mm	90 °	0	1	VERTIKAL	0,979 kg
UVB 3-48-350S	49 mm	346 mm	132 mm	90 °	0	1	VERTIKAL	1,218 kg

H: height

B: width



L: length

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

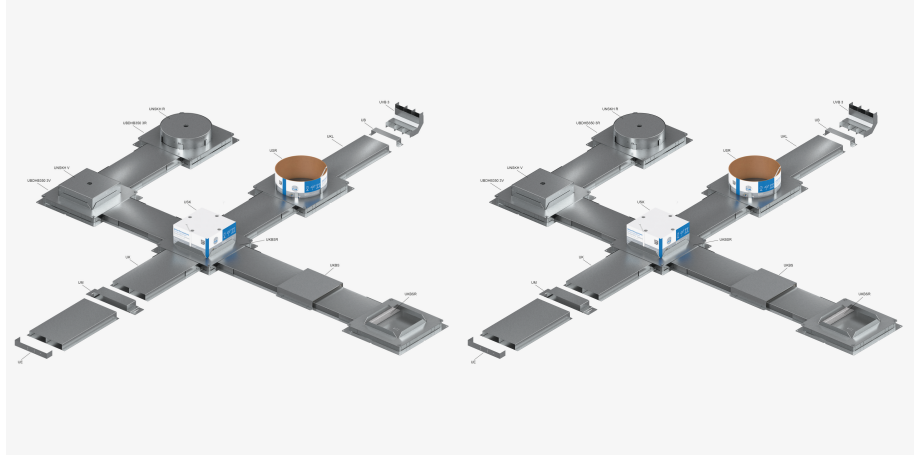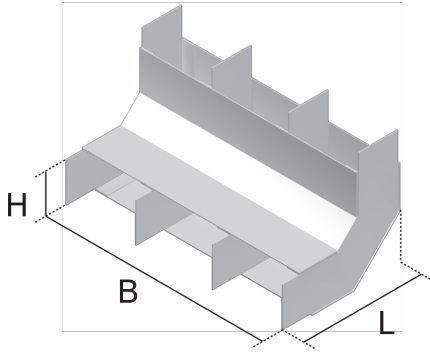

OPTIONAL ACCESSORIES

UB, UN



Load requirements according to, DIN EN 50085

