


## VAS-AS

Shear connector rod, stone

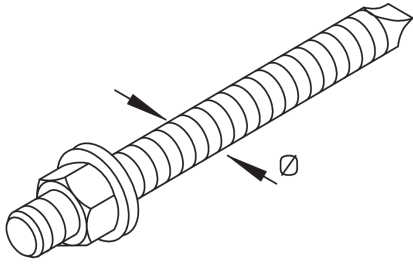

The approved shear connector rod VAS-AS in combination with the shear connector mortar VAB-HB M is approved or suitable for various building materials. The manufacturer's specifications must be observed. Load specifications apply depending on the substrate. The shear connector rod is available in diameters 8, 10 and 12 mm. The minimum drilling depth must be 80 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, galvanic zinc plated

| Products     | Ø     | L <sub>min</sub> | weight   |
|--------------|-------|------------------|----------|
| VAS-AS 8/15  | 8 mm  | 80 mm            | 0,039 kg |
| VAS-AS 10/25 | 10 mm | 80 mm            | 0,066 kg |
| VAS-AS 12/40 | 12 mm | 80 mm            | 0,118 kg |


Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

| Products       | Ø     | L <sub>min</sub> | weight   |
|----------------|-------|------------------|----------|
| VAS-AS 8/15E4  | 8 mm  | 80 mm            | 0,041 kg |
| VAS-AS 10/25E4 | 10 mm | 80 mm            | 0,071 kg |
| VAS-AS 12/40E4 | 12 mm | 80 mm            | 0,118 kg |

Ø: thread diameter  
L<sub>min</sub>: min. borehole depth

## DETAIL AND APPLICATION IMAGES



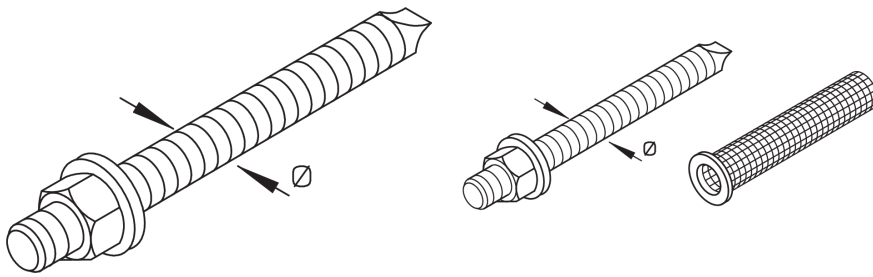

## OPTIONAL ACCESSORIES

VAS-BS, VAS-M, VAS-SH

