


## VAS-AS

Shear connector rod, stone

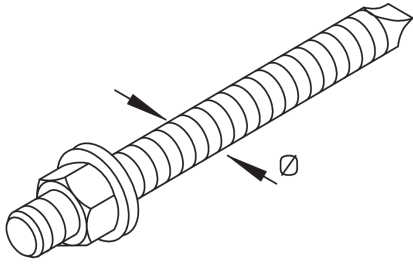

The approved shear connector rod VAS-AS in combination with the shear connector mortar VAB-HB M is approved or suitable for various building materials. The manufacturer's specifications must be observed. Load specifications apply depending on the substrate. The shear connector rod is available in diameters 8, 10 and 12 mm. The minimum drilling depth must be 80 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, galvanic zinc plated

Products	Ø	L <sub>min</sub>	weight
VAS-AS 8/15	8 mm	80 mm	0,039 kg
VAS-AS 10/25	10 mm	80 mm	0,066 kg
VAS-AS 12/40	12 mm	80 mm	0,118 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11


Products	Ø	L <sub>min</sub>	weight
VAS-AS 8/15E4	8 mm	80 mm	0,041 kg
VAS-AS 10/25E4	10 mm	80 mm	0,071 kg
VAS-AS 12/40E4	12 mm	80 mm	0,118 kg

Ø: thread diameter

L<sub>min</sub>: min. borehole depth

## DETAIL AND APPLICATION IMAGES



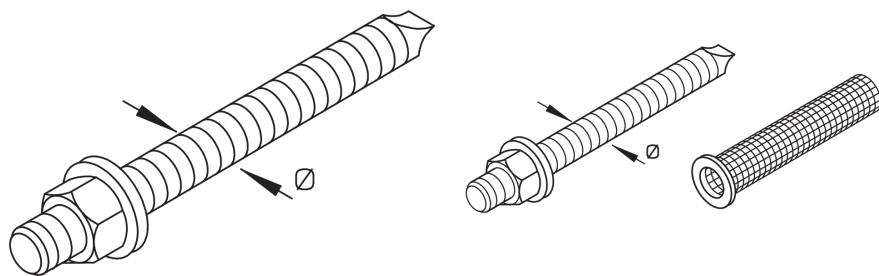

## OPTIONAL ACCESSORIES

VAS-BS, VAS-M, VAS-SH

