

WLD

Wide-span cover

The wide-span covers WLD are suitable for WL and WLR 200 wide-span cable trays and protect them from dirt, moisture and UV radiation. They are placed on top of the tray and secured with WLD-SW securing brackets. The cover is 237 to 637 mm side corresponding to the tray and has a standard length of 3000 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, continuously hot galvanized/Senzimir process

Products	B	L	t	weight
WLD 20S	237 mm	3000 mm	0,75 mm	4,557 kg
WLD 30S	337 mm	3000 mm	1,00 mm	8,431 kg
WLD 40S	437 mm	3000 mm	1,00 mm	10,786 kg
WLD 50S	537 mm	3000 mm	1,25 mm	16,426 kg
WLD 60S	637 mm	3000 mm	1,25 mm	19,370 kg

steel, batch/hot-dip galvanized


Products	B	L	t	weight
WLD 20F	237 mm	3000 mm	0,75 mm	4,400 kg
WLD 30F	337 mm	3000 mm	1,00 mm	8,390 kg
WLD 40F	437 mm	3000 mm	1,00 mm	10,910 kg
WLD 50F	537 mm	3000 mm	1,25 mm	16,790 kg
WLD 60F	637 mm	3000 mm	1,25 mm	19,940 kg

B: width
L: length
t: material thickness



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

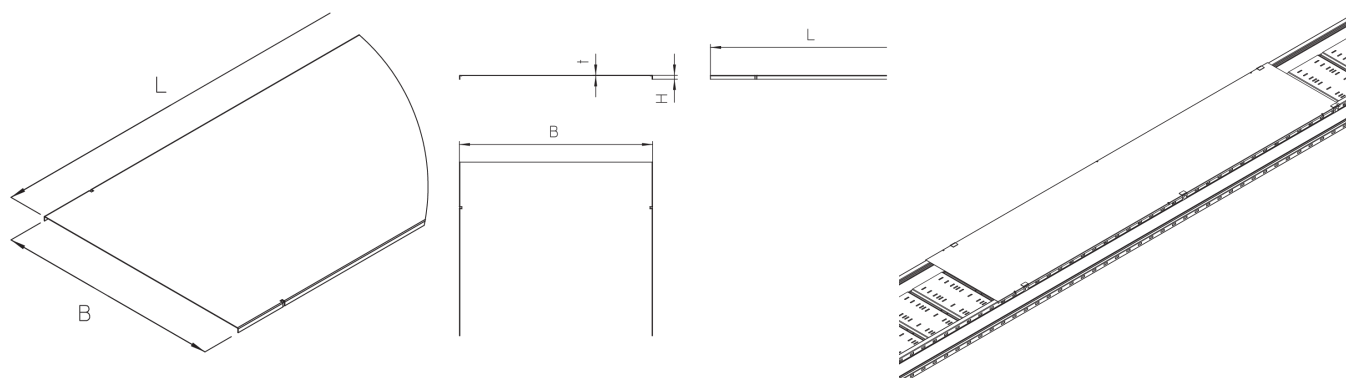

OPTIONAL ACCESSORIES

WLD-SW

