


WLRB 200

Wide-span cable tray bend, height = 204 mm

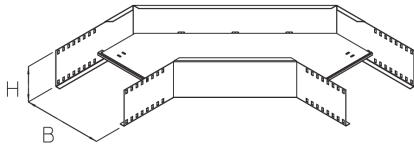

The wide-span cable tray bends WLRB 200 with integrated side connectors allow the direction of cable routing to be changed horizontally by 90°. They are suitable for WL 200 wide-span cable trays and are from 200 to 600 mm wide. The bend is inserted into the wide-span cable tray with a VB floor connector and bolted in place. The connecting tray is then mounted on the bend. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized


Products	H	B	L			weight
WLRB 200-20F	208 mm	237 mm	952 mm	90 °	HORIZONTAL	18,150 kg
incl.:						
16 × US 10X21F, 5 × FRSV 6X12E, 5 × SEMS 6E, 16 × SEM 10F, 16 × FRSV 10X20F						
WLRB 200-30F	208 mm	337 mm	1052 mm	90 °	HORIZONTAL	20,330 kg
incl.:						
5 × FRSV 6X12E, 5 × SEMS 6E, 16 × SEM 10F, 16 × FRSV 10X20F, 16 × US 10X21F						
WLRB 200-40F	208 mm	437 mm	1152 mm	90 °	HORIZONTAL	22,140 kg
incl.:						
5 × FRSV 6X12E, 5 × SEMS 6E, 16 × SEM 10F, 16 × FRSV 10X20F, 16 × US 10X21F						
WLRB 200-50F	208 mm	537 mm	1252 mm	90 °	HORIZONTAL	24,420 kg
incl.:						
5 × FRSV 6X12E, 5 × SEMS 6E, 16 × SEM 10F, 16 × FRSV 10X20F, 16 × US 10X21F						
WLRB 200-60F	208 mm	637 mm	1352 mm	90 °	HORIZONTAL	26,810 kg
incl.:						
5 × FRSV 6X12E, 5 × SEMS 6E, 16 × SEM 10F, 16 × FRSV 10X20F, 16 × US 10X21F						

H: height
B: width
L: length



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

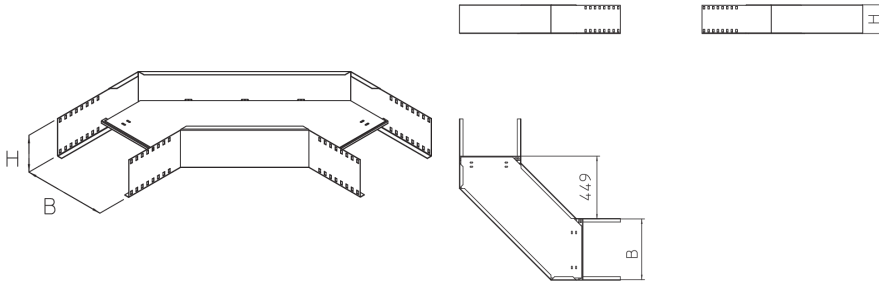

OPTIONAL ACCESSORIES

WLBD, WLBDR, EBW, WTRV 200

