


WPAD

Wide-span branch cover

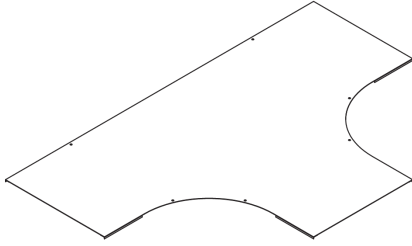

The wide-span branch cover WPAD is suitable for WPLA and WPRA wide-span branches and protects them from dirt, moisture and UV radiation. It is placed on top of the branch and secured with WPFDK or WPFDKA formed part cover clips. The latter are used if the cover is elevated. This improves the ventilation of the cables. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, continuously hot galvanized/Sendzimir process

Products	B	R	weight
WPAD 20S	251 mm	450 mm	3,940 kg
WPAD 30S	351 mm	450 mm	7,360 kg
WPAD 40S	451 mm	450 mm	9,630 kg
WPAD 50S	500 mm	450 mm	15,060 kg
WPAD 60S	651 mm	450 mm	18,270 kg

steel, batch/hot-dip galvanized

Products	B	R	weight
WPAD 20F	251 mm	450 mm	4,220 kg
WPAD 30F	351 mm	450 mm	7,880 kg
WPAD 40F	451 mm	450 mm	10,300 kg
WPAD 50F	551 mm	450 mm	16,110 kg
WPAD 60F	651 mm	450 mm	19,550 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	B	R	weight
WPAD 20E	251 mm	450 mm	3,940 kg

Page 1



PRODUCT INFORMATION

Products	B	R	weight
WPAD 30E	351 mm	450 mm	7,360 kg
WPAD 40E	451 mm	450 mm	9,630 kg
WPAD 50E	551 mm	450 mm	15,060 kg
WPAD 60E	651 mm	450 mm	18,270 kg

B: width
R: radius

DETAIL AND APPLICATION IMAGES

WPFDK / WPFDKA	
WPAD 20 - WPAD 60	6x
WPBD 20 - WPBD 40	4x
WPBD 50 - WPBD 60	5x
WPFD 20 - WPFD 60	4x
WPKD 20 - WPKD 60	8x
WPSD 20 - WPSD 60	4x

OPTIONAL ACCESSORIES

WPFDK 100, WPFDK 120, WPFDK 150, WPFDKA 100, WPFDKA 120, WPFDKA 150

