


WPL 150

Wide-span cable ladder, height = 150 mm



The wide-span cable ladders WPL 150 have rails 150 mm high and are available in widths of 200 to 600 mm. The standard length is 6000 mm. The rungs consist of perforated profile rails. The wide-span spar supports are to be used for fastening to the substructure. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

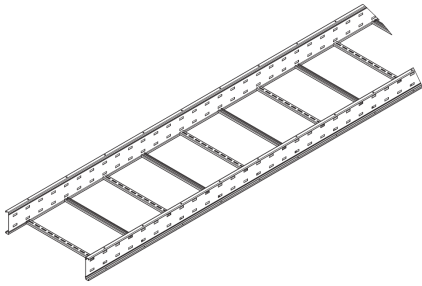

steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	t	A	Q _{LK}	W
WPL 150-20S	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	35,840 kg
WPL 150-30S	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	37,100 kg
WPL 150-40S	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	38,370 kg
WPL 150-50S	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	39,630 kg
WPL 150-60S	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	40,890 kg

steel, batch/hot-dip galvanized

Products	H	B	L	t	A	Q _{LK}	W
WPL 150-20F	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	38,350 kg
WPL 150-30F	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	39,700 kg
WPL 150-40F	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	41,050 kg
WPL 150-50F	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	42,400 kg
WPL 150-60F	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	43,760 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	t	A	Q _{LK}	W
WPL 150-20E	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	38,050 kg



PRODUCT INFORMATION


Products	H	B	L	t	A	Q_{LK}	W
WPL 150-30E	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	39,820 kg
WPL 150-40E	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	41,600 kg
WPL 150-50E	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	43,380 kg
WPL 150-60E	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	45,160 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Products	H	B	L	t	A	Q_{LK}	W
WPL 150-20E4	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	38,530 kg
WPL 150-30E4	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	40,330 kg
WPL 150-40E4	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	42,130 kg
WPL 150-50E4	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	43,930 kg
WPL 150-60E4	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	45,730 kg

H: height
B: width
L: length
t: material thickness
A: cross section area
 Q_{LK} :
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

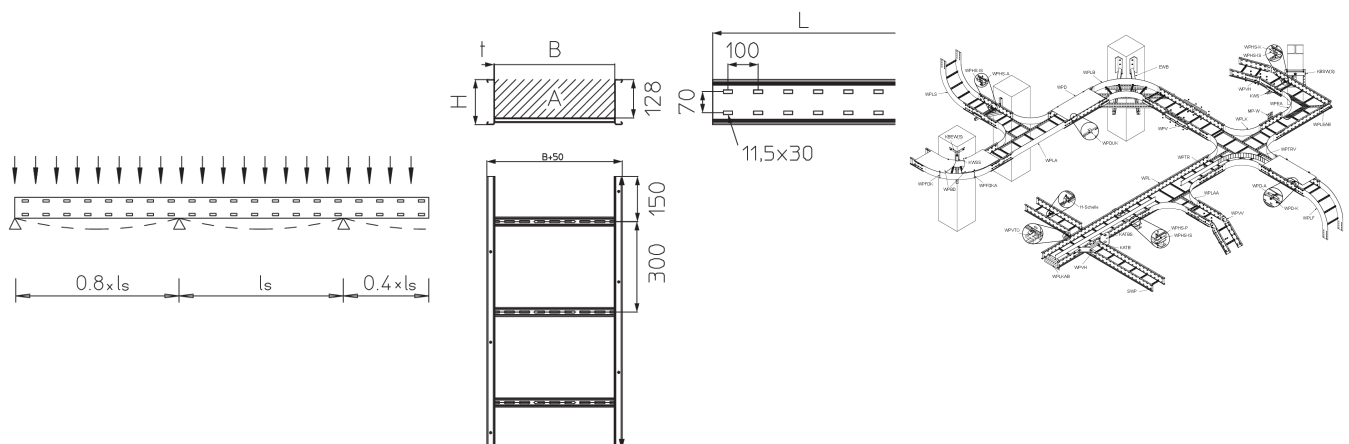


Page 2




PohlCon GmbH
 Nobelstraße 51 | 12057 Berlin
 Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com



PRODUCT INFORMATION

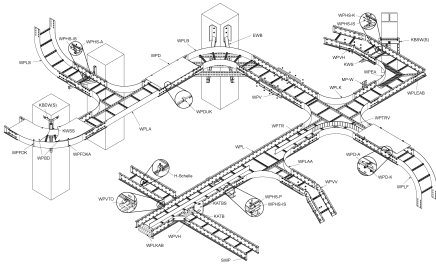

LOAD DIAGRAM

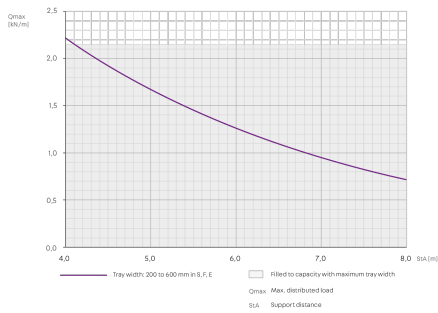

OPTIONAL ACCESSORIES

WPEA 150, WPLEAB 150, WPLB 150, WPLS 150, WPLF 150, WPLA 150, WPLAA 150, WPLK 150, WPV 150, WPLH 150, WPVH 150, WPVV 150, WPTR 150, WPHS-A, WPHS-K, WPHS-P, WPHS-IS, WPLKAB, H, WPD, SWP 150, MP-W

