


WPLAA 100

Wide-span cable ladder attachment branch, height = 100 mm



The wide-span cable ladder attachment branch WPLAA 100 allows the direction of cable routing to be changed in the form of a branch. It is suitable for wide-span cable ladders with rails 100 mm high and is 200 to 600 mm wide. The side rail of the main ladder is cut out at the point where the connecting rack is to branch off. The WPLAA attachment branch is positioned and bolted in place at this point. The connecting rack can then be pushed in. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Stainless steel, according to ASTM 304 / BS 304 S 3


Products	H	Height	B	L	R	W
WPLAA 100-20E	100 mm	100 mm	200 mm	1635 mm	450 mm	7,610 kg
incl.:						
16 x US 10X21E, 16 x SEM 10E, 16 x FRSV 10X20E						
WPLAA 100-30E	100 mm	100 mm	300 mm	1735 mm	450 mm	7,890 kg
incl.:						
16 x US 10X21E, 16 x SEM 10E, 16 x FRSV 10X20E						
WPLAA 100-40E	100 mm	100 mm	400 mm	1835 mm	450 mm	8,180 kg
incl.:						
16 x US 10X21E, 16 x SEM 10E, 16 x FRSV 10X20E						
WPLAA 100-50E	100 mm	100 mm	500 mm	1935 mm	450 mm	8,460 kg
incl.:						
16 x US 10X21E, 16 x SEM 10E, 16 x FRSV 10X20E						
WPLAA 100-60E	100 mm	100 mm	600 mm	2035 mm	450 mm	8,740 kg
incl.:						
16 x US 10X21E, 16 x SEM 10E, 16 x FRSV 10X20E						

H: height
B: width
L: length
R: radius
W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

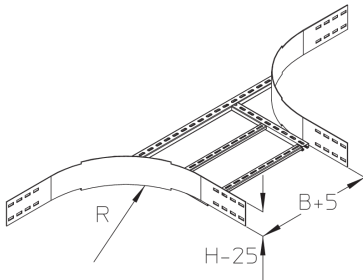

OPTIONAL ACCESSORIES

WPAD, WPTRV 100

