


WPLAA 150

Wide-span cable ladder attachment branch, height = 150 mm



The wide-span cable ladder attachment branch WPLAA 150 allows the direction of cable routing to be changed in the form of a branch. It is suitable for wide-span cable ladders with rails 150 mm high and is 200 to 600 mm wide. The side rail of the main ladder is cut out at the point where the connecting rack is to branch off. The WPLAA attachment branch is positioned and bolted in place at this point. The connecting rack can then be pushed in. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	B	L	R	W
WPLAA 150-20F	150 mm	200 mm	1630 mm	450 mm	10,870 kg
incl.:					
8 × KLS 10X20F					
WPLAA 150-30F	150 mm	300 mm	1730 mm	450 mm	11,170 kg
incl.:					
8 × KLS 10X20F					
WPLAA 150-40F	150 mm	400 mm	1830 mm	450 mm	11,470 kg
incl.:					
8 × KLS 10X20F					
WPLAA 150-50F	150 mm	500 mm	1930 mm	450 mm	11,770 kg
incl.:					
8 × KLS 10X20F					
WPLAA 150-60F	150 mm	600 mm	2030 mm	450 mm	12,070 kg
incl.:					
8 × KLS 10X20F					

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	R	W
WPLAA 150-20E	150 mm	200 mm	1630 mm	450 mm	10,300 kg

Page 1




PRODUCT INFORMATION

Products	H	B	L	R	W
incl.: 8 × KLS 10X20E					
WPLAA 150-30E	150 mm	300 mm	1730 mm	450 mm	10,580 kg
incl.: 8 × KLS 10X20E					
WPLAA 150-40E	150 mm	400 mm	1830 mm	450 mm	10,870 kg
incl.: 8 × KLS 10X20E					
WPLAA 150-50E	150 mm	500 mm	1930 mm	450 mm	11,160 kg
incl.: 8 × KLS 10X20E					
WPLAA 150-60E	150 mm	600 mm	2030 mm	450 mm	11,450 kg
incl.: 8 × KLS 10X20E					

H: height
B: width
L: length
R: radius
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

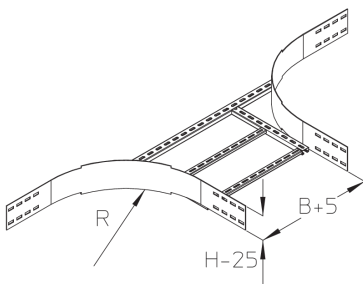

OPTIONAL ACCESSORIES

WPAD, WPTRV 150

