


WPLB 120

Wide-span cable ladder bend, height = 120 mm

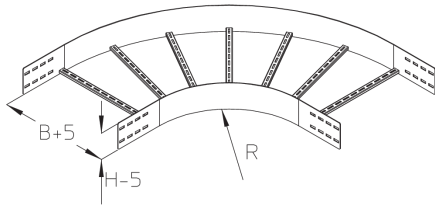

The wide-span floor duct bends WPLB 120 with integrated connectors allow the direction of cable routing to be changed horizontally by 90°. They are suitable for wide-span cable ladders with side rails 120 mm high and are 200 to 600 mm wide. The bend with an inner radius of 450 mm is inserted into the wide-span cable ladder and bolted in place. The connecting rack is then assembled to the bend. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized


| Products | H | B | R | | | W |
|----------------|--------|--------|--------|------|------------|-----------|
| WPLB 120-20F | 120 mm | 200 mm | 450 mm | 90 ° | HORIZONTAL | 8,870 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20F | | | | | | |
| WPLB 120-30F | 120 mm | 300 mm | 450 mm | 90 ° | HORIZONTAL | 9,690 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20F | | | | | | |
| WPLB 120-40F | 120 mm | 400 mm | 450 mm | 90 ° | HORIZONTAL | 10,810 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20F | | | | | | |
| WPLB 120-50F | 120 mm | 500 mm | 450 mm | 90 ° | HORIZONTAL | 12,070 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20F | | | | | | |
| WPLB 120-60F | 120 mm | 600 mm | 450 mm | 90 ° | HORIZONTAL | 13,040 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20F | | | | | | |

H: height
B: width
R: radius
W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

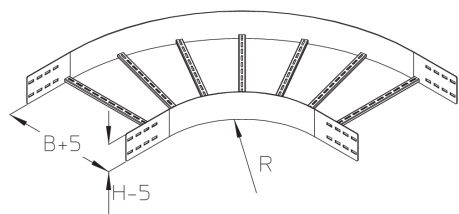

OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 120

