


WPLB 150

Wide-span cable ladder bend, height = 150 mm

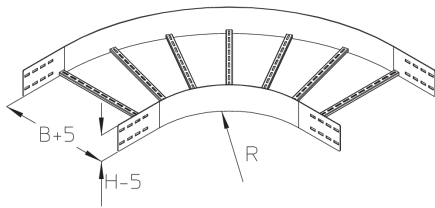

The wide-span floor duct bends WPLB 150 with integrated connectors allow the direction of cable routing to be changed horizontally by 90°. They are suitable for wide-span cable ladders with side rails 150 mm high and are 200 to 600 mm wide. The bend with an inner radius of 450 mm is inserted into the wide-span cable ladder and bolted in place. The connecting rack is then assembled to the bend. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	B	R			W
WPLB 150-20F	150 mm	200 mm	450 mm	90 °	HORIZONTAL	11,270 kg
incl.:						
8 × KLS 10X20F						
WPLB 150-30F	150 mm	300 mm	450 mm	90 °	HORIZONTAL	12,210 kg
incl.:						
8 × KLS 10X20F						
WPLB 150-40F	150 mm	400 mm	450 mm	90 °	HORIZONTAL	13,450 kg
incl.:						
8 × KLS 10X20F						
WPLB 150-50F	150 mm	500 mm	450 mm	90 °	HORIZONTAL	14,830 kg
incl.:						
8 × KLS 10X20F						
WPLB 150-60F	150 mm	600 mm	450 mm	90 °	HORIZONTAL	15,920 kg
incl.:						
8 × KLS 10X20F						

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	R			W
WPLB 150-20E	150 mm	200 mm	450 mm	90 °	HORIZONTAL	10,610 kg

Page 1




PRODUCT INFORMATION

Products	H	B	R	W		
incl.: 8 × KLS 10X20E						
WPLB 150-30E	150 mm	300 mm	450 mm	90 °	HORIZONTAL	11,500 kg
incl.: 8 × KLS 10X20E						
WPLB 150-40E	150 mm	400 mm	450 mm	90 °	HORIZONTAL	12,660 kg
incl.: 8 × KLS 10X20E						
WPLB 150-50E	150 mm	500 mm	450 mm	90 °	HORIZONTAL	13,970 kg
incl.: 8 × KLS 10X20E						
WPLB 150-60E	150 mm	600 mm	450 mm	90 °	HORIZONTAL	14,990 kg
incl.: 8 × KLS 10X20E						

H: height
B: width
R: radius
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

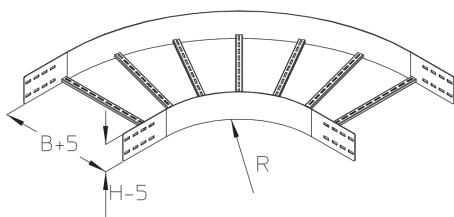

OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 150

