

WPLEAB 120

Wide-span cable ladder attachment corner element


The wide-span cable ladder attachment corner WPLEAB 120 allows the direction of cable routing to be changed horizontally by 90° and is suitable for wide-span cable ladders with side rails 120 mm high. As specified in the installation instructions, the WPEA attachment corner element is first mounted on the previously cut cable ladder and then the connecting tray is bolted to the corner attachment and corner connector. Finally, the additional rung is added towards the corner. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	R		weight
WPLEAB 120F	450 mm	90 °	7,964 kg
incl.:			
1 × AMF18 M6F, 10 × US 8X17E, 16 × FRSV 10X20F, 16 × SEM 10F, 16 × US 10X21F,			
8 × FRS 6X25E, 8 × SEM 6E, 1 × KHA 8-08F, 3 × FKS 6X20E, 2 × AMA18 M6F			

R: radius

DETAIL AND APPLICATION IMAGES

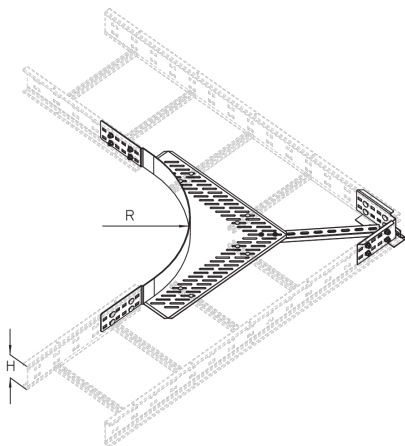

OPTIONAL ACCESSORIES

EBW, WPTRV 120

