


WPLF 100

Wide-span cable ladder riser, height = 100 mm

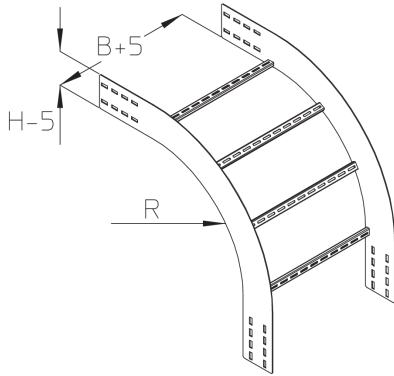

The wide-span floor duct riser WPLF 100 with integrated connectors allows the direction of cable routing to be changed vertically by 90° downwards. It is suitable for wide-span cable ladders with rails 100 mm high and is 200 to 600 mm wide. The riser is pushed into the wide-span cable ladder and then bolted in place. The connecting rack is then mounted on the riser. It has a radius of 450 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Stainless steel, according to ASTM 304 / BS 304 S 3


| Products | H | B | R | | | W |
|----------------|--------|--------|--------|------|------------------|----------|
| WPLF 100-20E | 100 mm | 200 mm | 450 mm | 90 ° | VERTIKAL-FALLEND | 6,840 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20E | | | | | | |
| WPLF 100-30E | 100 mm | 300 mm | 450 mm | 90 ° | VERTIKAL-FALLEND | 7,120 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20E | | | | | | |
| WPLF 100-40E | 100 mm | 400 mm | 450 mm | 90 ° | VERTIKAL-FALLEND | 7,400 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20E | | | | | | |
| WPLF 100-50E | 100 mm | 500 mm | 450 mm | 90 ° | VERTIKAL-FALLEND | 7,670 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20E | | | | | | |
| WPLF 100-60E | 100 mm | 600 mm | 450 mm | 90 ° | VERTIKAL-FALLEND | 7,950 kg |
| incl.: | | | | | | |
| 8 × KLS 10X20E | | | | | | |

H: height
B: width
R: radius
W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

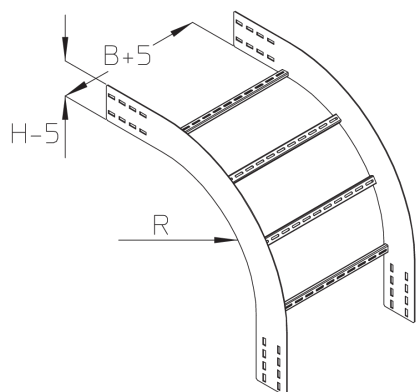

OPTIONAL ACCESSORIES

WPFD

