


WPR 100

Wide-span cable tray, height = 100 mm



The wide-span cable trays WPR 100 have rails 100 mm high and are available in widths of 200 to 600 mm. The standard length is 6000 mm. The maximum load capacities can only be achieved by using the rail supports. The wide-span spar supports are to be used for fastening to the substructure. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

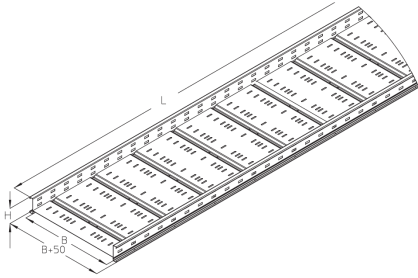

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	t	A	Q _{SK}	W
WPR 100-20E	100 mm	200 mm	6000 mm	1,50 mm	156 cm ²	0,23 kN/m	36,240 kg
WPR 100-30E	100 mm	300 mm	6000 mm	1,50 mm	234 cm ²	0,35 kN/m	43,120 kg
WPR 100-40E	100 mm	400 mm	6000 mm	1,50 mm	312 cm ²	0,47 kN/m	50,240 kg
WPR 100-50E	100 mm	500 mm	6000 mm	1,50 mm	390 cm ²	0,59 kN/m	57,360 kg
WPR 100-60E	100 mm	600 mm	6000 mm	1,50 mm	468 cm ²	0,7 kN/m	64,460 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11


Products	H	B	L	t	A	Q _{SK}	W
WPR 100-20E4	100 mm	200 mm	6000 mm	1,50 mm	156 cm ²	0,23 kN/m	36,240 kg
WPR 100-30E4	100 mm	300 mm	6000 mm	1,50 mm	234 cm ²	0,35 kN/m	43,700 kg
WPR 100-40E4	100 mm	400 mm	6000 mm	1,50 mm	312 cm ²	0,47 kN/m	50,900 kg
WPR 100-50E4	100 mm	500 mm	6000 mm	1,50 mm	390 cm ²	0,59 kN/m	58,100 kg

H: height
B: width
L: length
t: material thickness
A: cross section area
Q_{SK}: distributed load control cable
W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

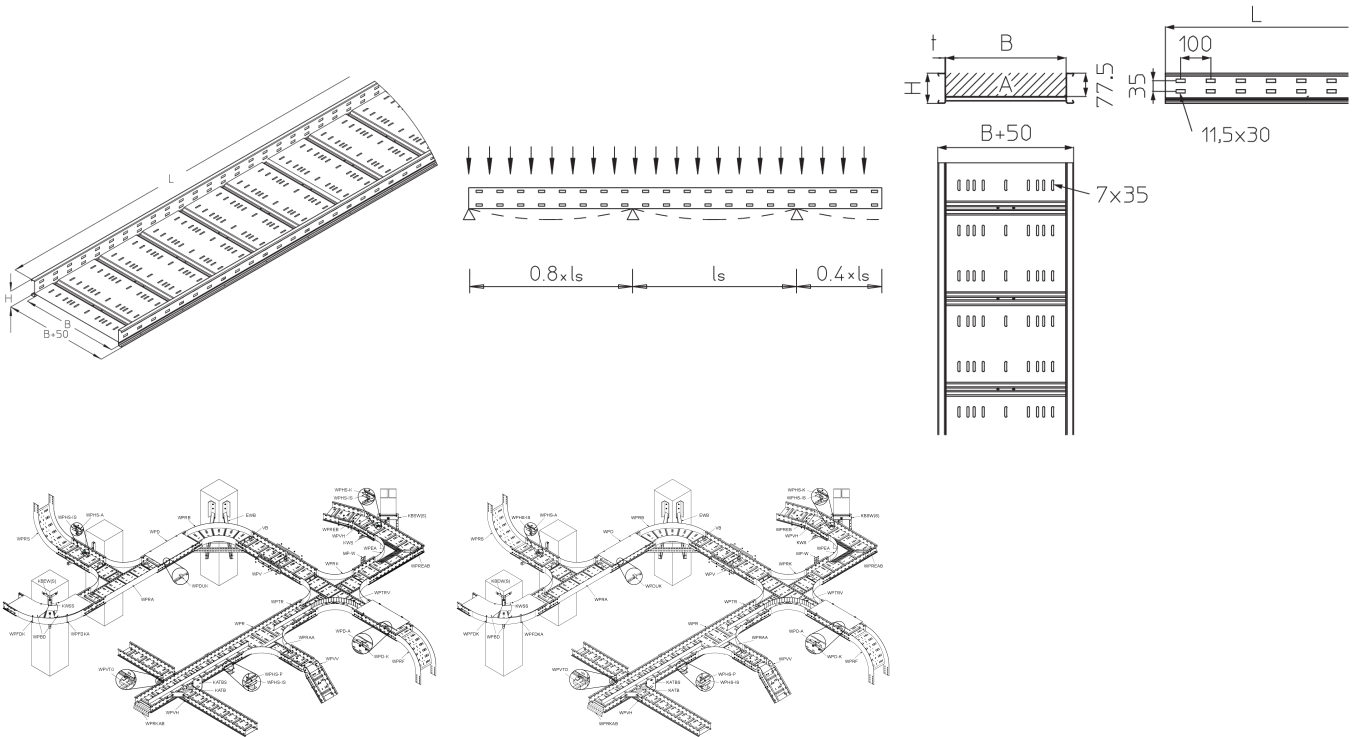

OPTIONAL ACCESSORIES

WPRB 100, WPREAB 100, WPEA 100, WPRA 100, WPRAA 100, WPRK 100, WPV 100, WPVH 100, WPVV 100, VB, WPTR 100, WPHS-A, WPHS-K, WPHS-P, WPHS-IS, WPREB, WPRKAB, H, WPD, MP-W

