


## WPRA 150

Wide-span cable tray branch, height = 150 mm

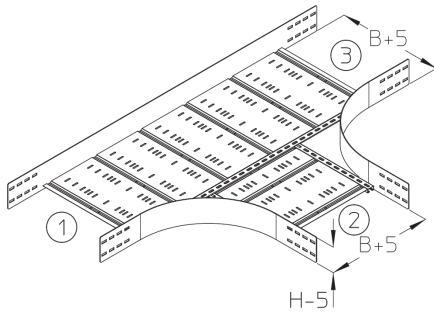

The T-shaped wide-span cable tray branch WPRA 150 with integrated side connectors allows the direction of cable routing to be changed in the form of a branch. It is suitable for wide-span cable trays with rails 150 mm high and is 200 to 600 mm side. It is used between two wide-span cable trays. The connection tray can then be pushed in with a VB floor connector. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	B	L	R	W
WPRA 150-20F	150 mm	200 mm	1170 mm	450 mm	21,190 kg
incl.:					
12 x KLS 10X20F					
WPRA 150-30F	150 mm	300 mm	1270 mm	450 mm	23,310 kg
incl.:					
12 x KLS 10X20F					
WPRA 150-40F	150 mm	400 mm	1370 mm	450 mm	25,600 kg
incl.:					
12 x KLS 10X20F					
WPRA 150-50F	150 mm	500 mm	1470 mm	450 mm	28,070 kg
incl.:					
12 x KLS 10X20F					
WPRA 150-60F	150 mm	600 mm	1570 mm	450 mm	30,710 kg
incl.:					
12 x KLS 10X20F					

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	R	W
WPRA 150-20E	150 mm	200 mm	1170 mm	450 mm	19,976 kg

Page 1




# PRODUCT INFORMATION

---

Products	H	B	L	R	W
WPRA 150-30E	150 mm	300 mm	1270 mm	450 mm	21,976 kg
WPRA 150-40E	150 mm	400 mm	1370 mm	450 mm	24,126 kg
WPRA 150-50E	150 mm	500 mm	1470 mm	450 mm	26,456 kg
WPRA 150-60E	150 mm	600 mm	1570 mm	450 mm	28,936 kg

**H:** height  
**B:** width  
**L:** length  
**R:** radius  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

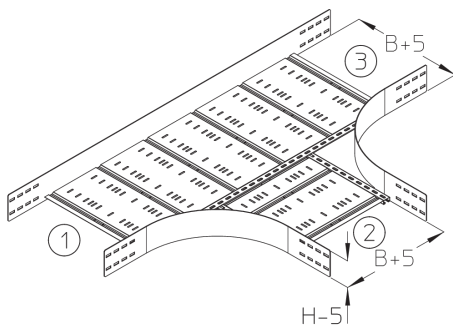

## OPTIONAL ACCESSORIES

WPAD, WPTRV 150

