


## WPRB 120

Wide-span cable tray bend, height = 120 mm

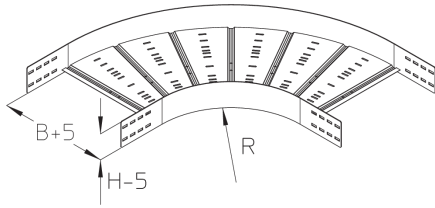

The wide-span cable tray bends WPRB 120 with integrated side connectors allow the direction of cable routing to be changed horizontally by 90°. They are suitable for wide-span cable trays with side rails 120 mm high and are 200 to 600 mm wide. The bend with an inner radius of 450 mm is inserted into the wide-span cable tray with a VB floor connector and bolted in place. The connecting channel is then mounted on the bend with a floor connector. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	B	R			weight
WPRB 120-20F	120 mm	200 mm	450 mm	90 °	HORIZONTAL	9,750 kg
incl.:						
8 × KLS 10X20F						
WPRB 120-30F	120 mm	300 mm	450 mm	90 °	HORIZONTAL	11,210 kg
incl.:						
8 × KLS 10X20F						
WPRB 120-40F	120 mm	400 mm	450 mm	90 °	HORIZONTAL	12,780 kg
incl.:						
8 × KLS 10X20F						
WPRB 120-50F	120 mm	500 mm	450 mm	90 °	HORIZONTAL	14,520 kg
incl.:						
8 × KLS 10X20F						
WPRB 120-60F	120 mm	600 mm	450 mm	90 °	HORIZONTAL	16,600 kg
incl.:						
8 × KLS 10X20F						


**H:** height  
**B:** width  
**R:** radius



# PRODUCT INFORMATION

---

## DETAIL AND APPLICATION IMAGES

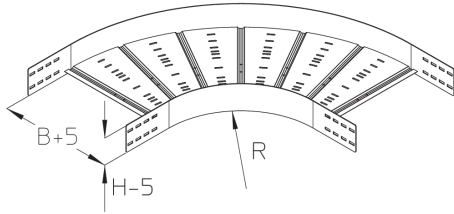

## OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 120

