


WPRB 150

Wide-span cable tray bend, height = 150 mm

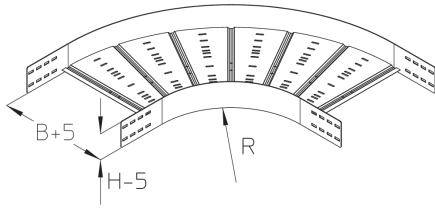

The wide-span cable tray bends WPRB 150 with integrated side connectors allow the direction of cable routing to be changed horizontally by 90°. They are suitable for wide-span cable trays with side rails 150 mm high and are 200 to 600 mm wide. The bend with an inner radius of 450 mm is inserted into the wide-span cable tray with a VB floor connector and bolted in place. The connecting channel is then mounted on the bend with a floor connector. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	Height	B	R	direction	α	W
WPRB 150-20F	150 mm	150 mm	200 mm	450 mm	horizontal	90°	12,140 kg
incl.:							
16 × US 10X21F, 16 × SEM 10F, 16 × FRSV 10X20F							
WPRB 150-30F	150 mm	150 mm	300 mm	450 mm	horizontal	90°	13,720 kg
incl.:							
16 × US 10X21F, 16 × SEM 10F, 16 × FRSV 10X20F							
WPRB 150-40F	150 mm	150 mm	400 mm	450 mm	horizontal	90°	15,410 kg
incl.:							
16 × US 10X21F, 16 × SEM 10F, 16 × FRSV 10X20F							
WPRB 150-50F	150 mm	150 mm	500 mm	450 mm	horizontal	90°	17,260 kg
incl.:							
16 × US 10X21F, 16 × SEM 10F, 16 × FRSV 10X20F							
WPRB 150-60F	150 mm	150 mm	600 mm	450 mm	horizontal	90°	19,270 kg
incl.:							
16 × US 10X21F, 16 × SEM 10F, 16 × FRSV 10X20F							

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	Height	B	R	direction	α	W
WPRB 150-20E	150 mm	150 mm	200 mm	450 mm	horizontal	90°	11,418 kg

Page 1



PRODUCT INFORMATION

Products	H	Height	B	R	direction	α	W
incl.: 16 x FRSV 10X20E, 16 x SEMS 10E							
WPRB 150-30E	150 mm	150 mm	300 mm	450 mm	horizontal	90°	12,888 kg
incl.: 16 x FRSV 10X20E, 16 x SEMS 10E							
WPRB 150-40E	150 mm	150 mm	400 mm	450 mm	horizontal	90°	14,488 kg
incl.: 16 x FRSV 10X20E, 16 x SEMS 10E							
WPRB 150-50E	150 mm	150 mm	500 mm	450 mm	horizontal	90°	16,228 kg
incl.: 16 x FRSV 10X20E, 16 x SEMS 10E							
WPRB 150-60E	150 mm	150 mm	600 mm	450 mm	horizontal	90°	18,108 kg
incl.: 16 x FRSV 10X20E, 16 x SEMS 10E							

H: height
B: width
R: radius
direction:


α

:

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



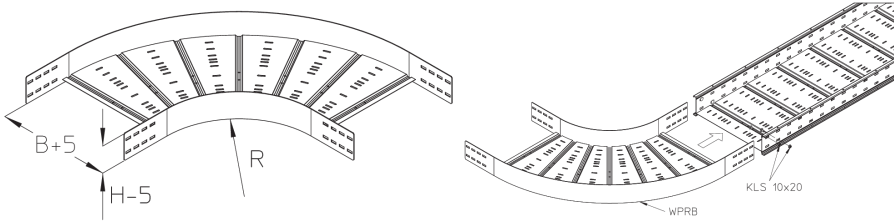

OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 150

