

WPRS 100

Wide-span cable tray riser, height = 100 mm

The wide-span cable tray riser WPRS 100 with integrated connectors allows the direction of cable routing to be changed vertically by 90° upwards. It is suitable for wide-span cable trays with rails 100 mm high and is 200 to 600 mm wide. The riser is pushed into the wide-span cable tray and then bolted in place. The connecting cable tray is then mounted on the riser. It has a radius of 525 mm.

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	Height	B	L	R	direction	α	W
WPRS 100-20E	100 mm	100 mm	200 mm	565 mm	525 mm	vertically rising	90°	8,098 kg
incl.:								
16 x FRSV 10X20E, 16 x SEMS 10E								
WPRS 100-30E	100 mm	100 mm	300 mm	565 mm	525 mm	vertically rising	90°	8,818 kg
incl.:								
16 x FRSV 10X20E, 16 x SEMS 10E								
WPRS 100-40E	100 mm	100 mm	400 mm	565 mm	525 mm	vertically rising	90°	9,558 kg
incl.:								
16 x FRSV 10X20E, 16 x SEMS 10E								
WPRS 100-50E	100 mm	100 mm	500 mm	565 mm	525 mm	vertically rising	90°	10,298 kg
incl.:								
16 x FRSV 10X20E, 16 x SEMS 10E								
WPRS 100-60E	100 mm	100 mm	600 mm	565 mm	525 mm	vertically rising	90°	11,038 kg
incl.:								
16 x FRSV 10X20E, 16 x SEMS 10E								

H: height
B: width
L: length
R: radius
direction:

α


Page 1



PRODUCT INFORMATION

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

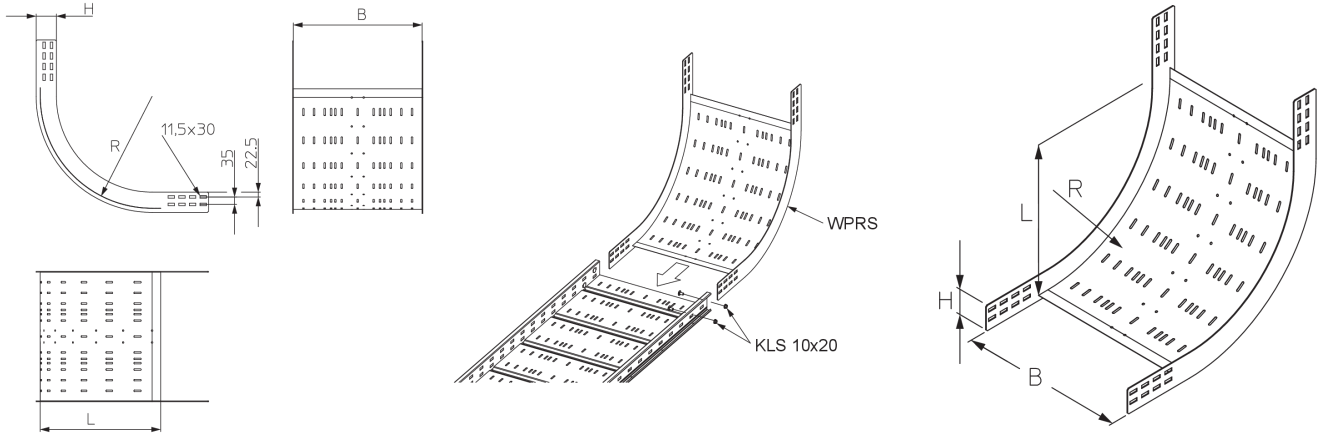

OPTIONAL ACCESSORIES

WPSD

