


A 2

profile rail 30x15 mm, not perforated

profile rail 50x31x3.25 mm, without perforation, slot size 22 mm

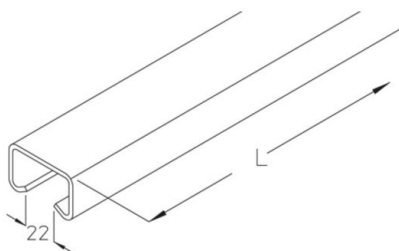

Bright rolled

Product	H	B	L	t	G
A 2-30B	31 mm	50 mm	3000 mm	3,25 mm	8,8 kg
A 2-60B	31 mm	50 mm	6000 mm	3,25 mm	17,6 kg



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
A 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9,4 kg
A 2-60F	31 mm	50 mm	6000 mm	3,25 mm	18,8 kg

H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS



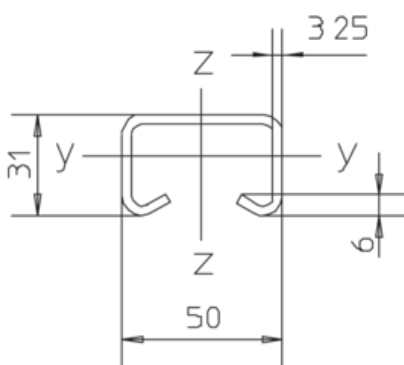

$$\begin{aligned}W_y &= 2.45 \text{ cm}^3 \\W_z &= 5.42 \text{ cm}^3 \\I_y &= 4.33 \text{ cm}^4 \\I_z &= 13.54 \text{ cm}^4\end{aligned}$$

OPTIONAL ACCESSORIES

HS22, SKS H

