


A 4

profile rail 48x26 mm, not perforated

profile rail 48x26x2.50 mm, without perforation, slot size 22 mm

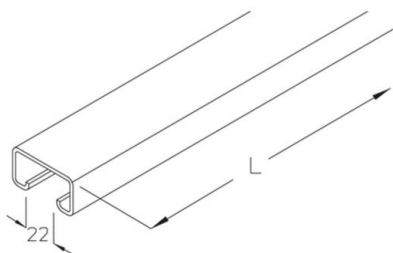

Bright rolled

Product	H	B	L	t	G
A 4-30B	26 mm	48 mm	3000 mm	2,50 mm	6,7 kg
A 4-60B	26 mm	48 mm	6000 mm	2,50 mm	13,4 kg



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
A 4-30F	26 mm	48 mm	3000 mm	2,50 mm	7,2 kg
A 4-60F	26 mm	48 mm	6000 mm	2,50 mm	14,4 kg

H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS



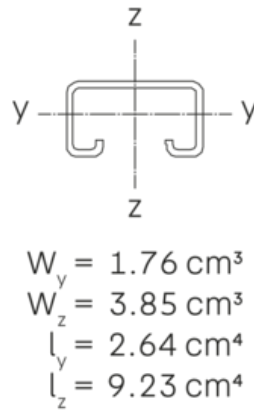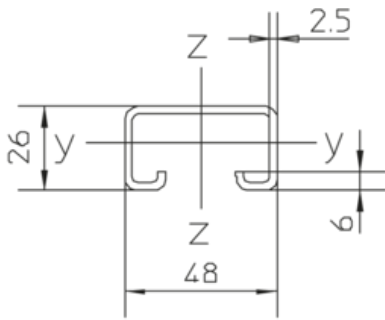

$$W_y = 1.76 \text{ cm}^3$$
$$W_z = 3.85 \text{ cm}^3$$
$$I_y = 2.64 \text{ cm}^4$$
$$I_z = 9.23 \text{ cm}^4$$

OPTIONAL ACCESSORIES

HS22, ASK 4

