

ACF-E

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of high-grade steel. For fastening to C-profile rails (C) with a slot size > 10 mm.

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	D	H _{max}	M	number of cables	G
12 ACF-E	8-12 mm	41 mm	2 Nm	1	2,4 kg/100
16 ACF-E	12-16 mm	46 mm	2 Nm	1	2,8 kg/100
20 ACF-E	16-20 mm	50 mm	2 Nm	1	3,1 kg/100
24 ACF-E	20-24 mm	54 mm	2 Nm	1	3,5 kg/100
28 ACF-E	24-28 mm	58 mm	2 Nm	1	3,9 kg/100
32 ACF-E	28-32 mm	63 mm	2 Nm	1	4,9 kg/100
36 ACF-E	32-36 mm	67 mm	2 Nm	1	5,8 kg/100
40 ACF-E	36-40 mm	71 mm	2 Nm	1	6,5 kg/100
44 ACF-E	40-44 mm	81 mm	4 Nm	1	7,4 kg/100
48 ACF-E	44-48 mm	85 mm	4 Nm	1	8,9 kg/100
52 ACF-E	48-52 mm	90 mm	4 Nm	1	9,9 kg/100
56 ACF-E	52-56 mm	94 mm	4 Nm	1	10,2 kg/100
12/2 ACF-E	8-12 mm	58 mm	2 Nm	2	3,1 kg/100
16/2 ACF-E	12-16 mm	67 mm	2 Nm	2	3,7 kg/100
20/2 ACF-E	16-20 mm	75 mm	2 Nm	2	4,2 kg/100
24/2 ACF-E	20-24 mm	84 mm	2 Nm	2	4,8 kg/100
28/2 ACF-E	24-28 mm	92 mm	2 Nm	2	5,5 kg/100
32/2 ACF-E	28-32 mm	101 mm	2 Nm	2	7,3 kg/100
36/2 ACF-E	32-36 mm	109 mm	2 Nm	2	8,1 kg/100
40/2 ACF-E	36-40 mm	117 mm	2 Nm	2	9,4 kg/100
44/2 ACF-E	40-44 mm	127 mm	4 Nm	2	11,7 kg/100

Page 1



Product	D	H _{max}	M	number of cables	G
48/2 ACF-E	44-48 mm	135 mm	4 Nm	2	12,8 kg/100
52/2 ACF-E	48-52 mm	144 mm	4 Nm	2	13,8 kg/100
56/2 ACF-E	52-56 mm	152 mm	4 Nm	2	15,4 kg/100

D: diameter


H_{max}: Maximum height

M: torque

number of cables: Maximum number of installable cables

G: weight

DETAILS / APPLICATIONS

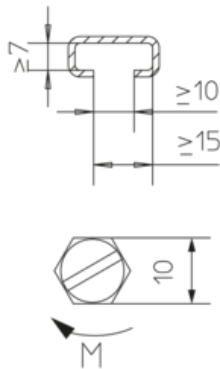

OPTIONAL ACCESSORIES

B 3, B 6, A 41, A 2, A 4, A 9, A 8, A 7, KHA 21, KHA 41

