

## AVLW

rail connector, angular

corner connector 90 ° 1-1, 1-2, 1-3 or 2-2 hole


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
AVLW 1-1F	40 mm	42 mm	58 mm	6,00 mm	0,17 kg
AVLW 1-2F	40 mm	42 mm	106 mm	6,00 mm	0,26 kg
AVLW 1-3F	40 mm	58 mm	136 mm	6,00 mm	0,36 kg
AVLW 2-2F	40 mm	89 mm	106 mm	6,00 mm	0,30 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



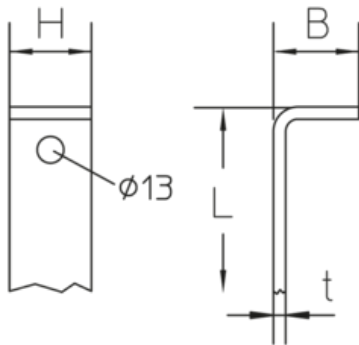

## OPTIONAL ACCESSORIES

AM22, AMF22

