

## BGUQ 50

screwed head plate 90° turned, STU 50

head plate for fastening profile U 50 bracket supports to ceiling, certified according to DIN 4102-12

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
BGUQ 50F	156 mm	80 mm	150 mm	0,86 kg
incl.:				
2x SEM 10F		hexagon-nut, DIN 934		
2x FRSV 10X20F		round-head screw with short square, DIN 603		


Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
BGUQ 50E	156 mm	80 mm	150 mm	0,86 kg
incl.:				
2x SEM 10E		hexagon-nut, DIN 934		
2x FRSV 10X20E		round-head screw with short square, DIN 603		

**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS



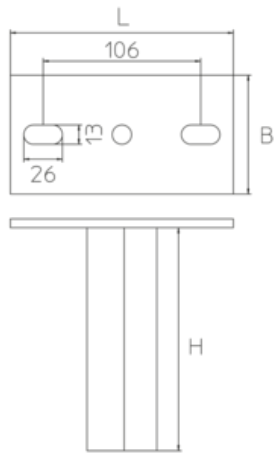

## OPTIONAL ACCESSORIES

SD

