


BKAADR

floor duct attachment branch cover with turning bolts

In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.




Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P _{max}	G
BKAADR 10S	100 mm	2,00 mm	5 kN	0,23 kg
BKAADR 15S	150 mm	2,00 mm	5 kN	0,28 kg
BKAADR 20S	200 mm	2,00 mm	5 kN	0,33 kg
BKAADR 30S	300 mm	2,00 mm	5 kN	0,43 kg
BKAADR 40S	400 mm	2,00 mm	5 kN	0,53 kg
BKAADR 50S	500 mm	2,00 mm	5 kN	0,64 kg
BKAADR 60S	600 mm	2,00 mm	5 kN	0,74 kg

B: width
t: material thickness
P_{max}: Maximum load
G: weight

DETAILS / APPLICATIONS



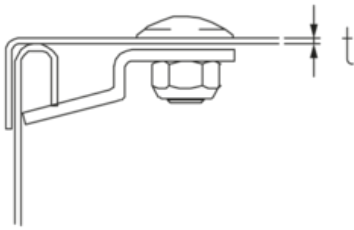

OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

