


BKB45 100

floor duct bend, height = 100 mm

floor duct bend 45° for horizontal change of direction with integrated connectors



From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.




Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	t	G
BKB45 100-10S	100 mm	100 mm	2,00 mm	1,70 kg
incl.: 4x KLR	clamp fastening set			
BKB45 100-15S	100 mm	150 mm	2,00 mm	1,94 kg
incl.: 4x KLR	clamp fastening set			
BKB45 100-20S	100 mm	200 mm	2,00 mm	2,20 kg
incl.: 4x KLR	clamp fastening set			
BKB45 100-30S	100 mm	300 mm	2,00 mm	2,82 kg
incl.: 4x KLR	clamp fastening set			
BKB45 100-40S	100 mm	400 mm	2,00 mm	3,59 kg
incl.: 4x KLR	clamp fastening set			
BKB45 100-50S	100 mm	500 mm	2,00 mm	4,47 kg
incl.: 4x KLR	clamp fastening set			
BKB45 100-60S	100 mm	600 mm	2,00 mm	5,48 kg
incl.: 4x KLR	clamp fastening set			



H: height
B: width
t: material thickness
G: weight

DETAILS / APPLICATIONS

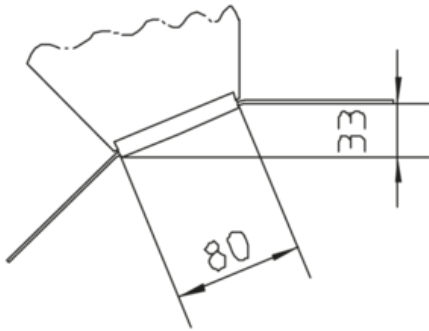

OPTIONAL ACCESSORIES

BKBDR45, BKBDR45-RHP, BKBDR45-WZB AL, BKRTV 100, BKDS 100



UL classified

