


BKB45 110

floor duct bend, height = 110 mm

floor duct bend 45° for horizontal change of direction with integrated connectors



From a width \geq 300 mm, one separating strip must be installed. From a width of \geq 500 mm, two separating strips must be installed.


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | t | G |
|------------------|---------------------|--------|---------|---------|
| BKB45 110-10S | 110 mm | 100 mm | 2,00 mm | 1,74 kg |
| incl.: 4x KLR | clamp fastening set | | | |
| BKB45 110-15S | 110 mm | 150 mm | 2,00 mm | 2,00 kg |
| incl.: 4x KLR | clamp fastening set | | | |
| BKB45 110-20S | 110 mm | 200 mm | 2,00 mm | 2,25 kg |
| incl.: 4x KLR | clamp fastening set | | | |
| BKB45 110-30S | 110 mm | 300 mm | 2,00 mm | 2,89 kg |
| incl.: 4x KLR | clamp fastening set | | | |
| BKB45 110-40S | 110 mm | 400 mm | 2,00 mm | 3,67 kg |
| incl.: 4x KLR | clamp fastening set | | | |
| BKB45 110-50S | 110 mm | 500 mm | 2,00 mm | 4,56 kg |
| incl.: 4x KLR | clamp fastening set | | | |
| BKB45 110-60S | 110 mm | 600 mm | 2,00 mm | 5,68 kg |
| incl.: 4x KLR | clamp fastening set | | | |



H: height
B: width
t: material thickness
G: weight

DETAILS / APPLICATIONS

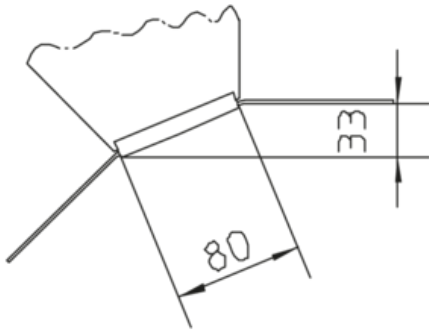

OPTIONAL ACCESSORIES

BKBDR45, BKBDR45-RHP, BKBDR45-WZB AL, BKRTV 110, BKDS 110

