


## BKBDR-RHP

floor duct bend cover with non-slip embossing



The cover consists of a 2 mm thick galvanized sheet steel with 1 mm non-slip embossing and slip resistance R12 according to DIN 51130. In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P <sub>max</sub>	slip resistance class	G
BKBDR-RHP 10S	100 mm	2,00 mm	5 kN	R12	0,36 kg
BKBDR-RHP 15S	150 mm	2,00 mm	5 kN	R12	0,65 kg
BKBDR-RHP 20S	200 mm	2,00 mm	5 kN	R12	0,94 kg
BKBDR-RHP 30S	300 mm	2,00 mm	5 kN	R12	1,75 kg
BKBDR-RHP 40S	400 mm	2,00 mm	5 kN	R12	2,84 kg
BKBDR-RHP 50S	500 mm	2,00 mm	5 kN	R12	4,18 kg
BKBDR-RHP 60S	600 mm	2,00 mm	5 kN	R12	5,78 kg

**B:** width

**t:** material thickness


**P<sub>max</sub>:** Maximum load

**slip resistance class:** slip resistance according to DIN 51130

**G:** weight

## DETAILS / APPLICATIONS



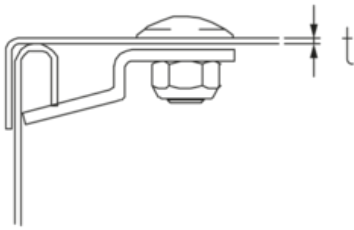

## OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

