


BKBGDR

floor duct bend cover with mitre cut and turning bolts

In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

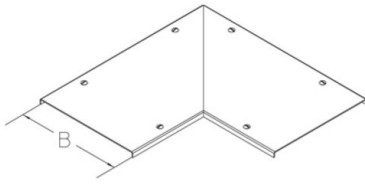

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P _{max}	G
BKBGDR 10S	100 mm	2,00 mm	5 kN	1,27 kg
incl.:				
1x BKGRDR 10S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 10S	floor duct cover, left with mitre cut and turning bolts			
BKBGDR 15S	150 mm	2,00 mm	5 kN	1,86 kg
incl.:				
1x BKGRDR 15S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 15S	floor duct cover, left with mitre cut and turning bolts			
BKBGDR 20S	200 mm	2,00 mm	5 kN	2,53 kg
incl.:				
1x BKGRDR 20S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 20S	floor duct cover, left with mitre cut and turning bolts			
BKBGDR 30S	300 mm	2,00 mm	5 kN	4,10 kg
incl.:				
1x BKGRDR 30S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 30S	floor duct cover, left with mitre cut and turning bolts			
BKBGDR 40S	400 mm	2,00 mm	5 kN	5,99 kg
incl.:				
1x BKGRDR 40S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 40S	floor duct cover, left with mitre cut and turning bolts			
BKBGDR 50S	500 mm	2,00 mm	5 kN	8,19 kg
incl.:				
1x BKGRDR 50S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 50S	floor duct cover, left with mitre cut and turning bolts			


Page 1



Product	B	t	P _{max}	G
BKBGDR 60S	600 mm	2,00 mm	5 kN	10,70 kg
incl.:				
1x BKGRDR 60S	floor duct cover, right with mitre cut and turning bolts			
1x BKGLDR 60S	floor duct cover, left with mitre cut and turning bolts			

B: width
t: material thickness
P_{max}: Maximum load
G: weight

DETAILS / APPLICATIONS

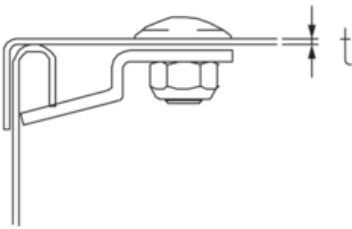

OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

