


BKBR 100

floor duct bend with radius, height = 100 mm

From a width \geq 300 mm, one separating strip must be installed. From a width of \geq 500 mm, two separating strips must be installed.

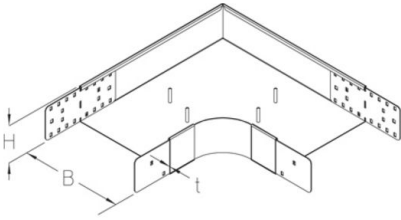

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	t	G
BKBR 100-10S	100 mm	100 mm	2,00 mm	3,52 kg
incl.: 6x KLR 2x BKV 100S clamp fastening set floor duct connector, height = 95 mm				
BKBR 100-15S	100 mm	150 mm	2,00 mm	4,15 kg
incl.: 6x KLR 2x BKV 100S clamp fastening set floor duct connector, height = 95 mm				
BKBR 100-20S	100 mm	200 mm	2,00 mm	4,87 kg
incl.: 6x KLR 2x BKV 100S clamp fastening set floor duct connector, height = 95 mm				
BKBR 100-30S	100 mm	300 mm	2,00 mm	6,53 kg
incl.: 6x KLR 2x BKV 100S clamp fastening set floor duct connector, height = 95 mm				
BKBR 100-40S	100 mm	400 mm	2,00 mm	8,51 kg
incl.: 6x KLR 2x BKV 100S clamp fastening set floor duct connector, height = 95 mm				
BKBR 100-50S	100 mm	500 mm	2,00 mm	10,8 kg
incl.: 6x KLR 2x BKV 100S clamp fastening set floor duct connector, height = 95 mm				


Page 1



Product	H	B	t	G
BKBR 100-60S	100 mm	600 mm	2,00 mm	13,41 kg
incl:				
6x KLR		clamp fastening set		
2x BKV 100S		floor duct connector, height = 95 mm		

H: height
B: width
t: material thickness
G: weight

DETAILS / APPLICATIONS

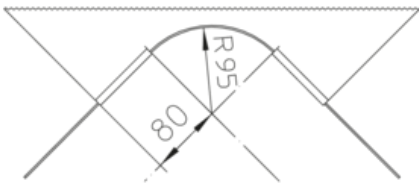

OPTIONAL ACCESSORIES

BKBRDR, BKBRDR-RHP, BKBRDR-WZB AL, BKRTV 100, BKDS 100

