


BKBR 110

floor duct bend with radius, height = 110 mm

From a width \geq 300 mm, one separating strip must be installed. From a width of \geq 500 mm, two separating strips must be installed.

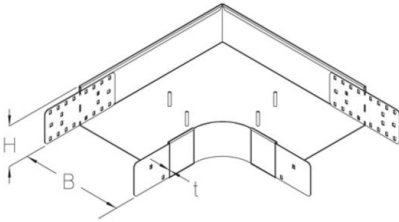

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	t	G
BKBR 110-10S	110 mm	100 mm	2,00 mm	3,87 kg
incl.: 6x KLR 2x BKV 110S clamp fastening set floor duct connector, height = 95 mm				
BKBR 110-15S	110 mm	150 mm	2,00 mm	4,52 kg
incl.: 6x KLR 2x BKV 110S clamp fastening set floor duct connector, height = 95 mm				
BKBR 110-20S	110 mm	200 mm	2,00 mm	5,25 kg
incl.: 6x KLR 2x BKV 110S clamp fastening set floor duct connector, height = 95 mm				
BKBR 110-30S	110 mm	300 mm	2,00 mm	6,94 kg
incl.: 6x KLR 2x BKV 110S clamp fastening set floor duct connector, height = 95 mm				
BKBR 110-40S	110 mm	400 mm	2,00 mm	8,96 kg
incl.: 6x KLR 2x BKV 110S clamp fastening set floor duct connector, height = 95 mm				
BKBR 110-50S	110 mm	500 mm	2,00 mm	11,28 kg
incl.: 6x KLR 2x BKV 110S clamp fastening set floor duct connector, height = 95 mm				


Page 1



Product	H	B	t	G
BKBR 110-60S	110 mm	600 mm	2,00 mm	13,92 kg
incl.:				
6x KLR	clamp fastening set			
2x BKV 110S	floor duct connector, height = 95 mm			

H: height
B: width
t: material thickness
G: weight

DETAILS / APPLICATIONS

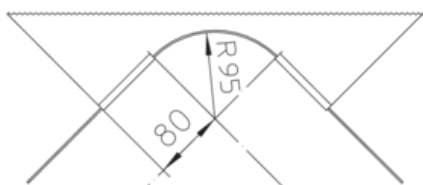

OPTIONAL ACCESSORIES

BKBRDR, BKBRDR-RHP, BKBRDR-WZB AL, BKRTV 110, BKDS 110

