


BKD-RHP

floor duct cover with non-slip embossing



The floor channel lid hinge BKD-S connects the lid BKD-RHP with the floor channel BK. In this way, the lid can be opened. The hinge fits the pre-stamped knock-out slugs in the BK and BKD-RHP. The slugs must be knocked out and the hinge screwed in place using the KLR clamp fastening set. Three hinges are recommended for the BKD-RHP cover, two hinges for the BKD-RHP short pieces (1.5m and 1m). KLR must be ordered separately.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Product	B	L	t	P _{max}	slip resistance class	G
BKD-RHP 10S	100 mm	3000 mm	2,00 mm	5 kN	R12	6,03 kg
BKD-RHP 15S	150 mm	3000 mm	2,00 mm	5 kN	R12	8,38 kg
BKD-RHP 20S	200 mm	3000 mm	2,00 mm	5 kN	R12	10,74 kg
BKD-RHP 30S	300 mm	3000 mm	2,00 mm	5 kN	R12	15,45 kg
BKD-RHP 40S	400 mm	3000 mm	2,00 mm	5 kN	R12	20,16 kg
BKD-RHP 50S	500 mm	3000 mm	2,00 mm	5 kN	R12	24,87 kg
BKD-RHP 60S	600 mm	3000 mm	2,00 mm	5 kN	R12	29,58 kg
BKD-RHP 1.5-10S	100 mm	1500 mm	2,00 mm	5 kN	R12	3,01 kg
BKD-RHP 1.5-15S	150 mm	1500 mm	2,00 mm	5 kN	R12	4,19 kg
BKD-RHP 1.5-20S	200 mm	1500 mm	2,00 mm	5 kN	R12	5,37 kg
BKD-RHP 1.5-30S	300 mm	1500 mm	2,00 mm	5 kN	R12	7,72 kg
BKD-RHP 1.5-40S	400 mm	1500 mm	2,00 mm	5 kN	R12	10,08 kg
BKD-RHP 1.5-50S	500 mm	1500 mm	2,00 mm	5 kN	R12	12,43 kg
BKD-RHP 1.5-60S	600 mm	1500 mm	2,00 mm	5 kN	R12	14,79 kg
BKD-RHP 1-10S	100 mm	1000 mm	2,00 mm	5 kN	R12	2,01 kg
BKD-RHP 1-15S	150 mm	1000 mm	2,00 mm	5 kN	R12	2,79 kg
BKD-RHP 1-20S	200 mm	1000 mm	2,00 mm	5 kN	R12	3,58 kg
BKD-RHP 1-30S	300 mm	1000 mm	2,00 mm	5 kN	R12	5,15 kg
BKD-RHP 1-40S	400 mm	1000 mm	2,00 mm	5 kN	R12	6,72 kg
BKD-RHP 1-50S	500 mm	1000 mm	2,00 mm	5 kN	R12	8,29 kg
BKD-RHP 1-60S	600 mm	1000 mm	2,00 mm	5 kN	R12	9,86 kg

Page 1



B: width
L: length
t: material thickness
P_{max}: Maximum load
slip resistance class: slip resistance according to DIN 51130
G: weight

DETAILS / APPLICATIONS

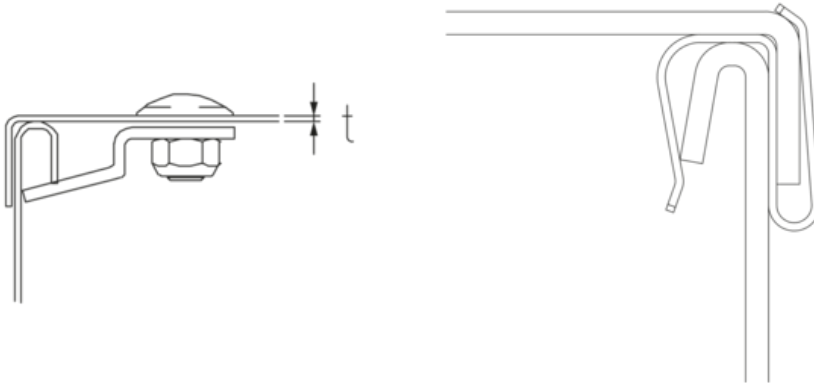

OPTIONAL ACCESSORIES

DR-BK, BKDHK, BKDH, BKDSL, BKDU 100, BKDU 110, BKD-S

