


BKGLDR-RHP

floor duct cover, left with mitre cut and non-slip embossing



The cover consists of a 2 mm thick galvanized sheet steel with 1 mm non-slip embossing and slip resistance R12 according to DIN 51130. In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P_{max}	slip resistance class	G
BKGLDR-RHP 10S	100 mm	2,00 mm	5 kN	R12	0,63 kg
BKGLDR-RHP 15S	150 mm	2,00 mm	5 kN	R12	0,93 kg
BKGLDR-RHP 20S	200 mm	2,00 mm	5 kN	R12	1,25 kg
BKGLDR-RHP 30S	300 mm	2,00 mm	5 kN	R12	2,05 kg
BKGLDR-RHP 40S	400 mm	2,00 mm	5 kN	R12	2,99 kg
BKGLDR-RHP 50S	500 mm	2,00 mm	5 kN	R12	4,09 kg
BKGLDR-RHP 60S	600 mm	2,00 mm	5 kN	R12	5,35 kg

B: width

t: material thickness


P_{max} : Maximum load

slip resistance class: slip resistance according to DIN 51130

G: weight

DETAILS / APPLICATIONS



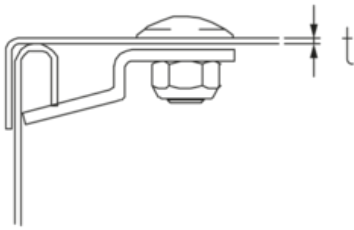

OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

