


## BKGRDR

floor duct cover, right with mitre cut and turning bolts

In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.




Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P <sub>max</sub>	G
BKGRDR 10S	100 mm	2,00 mm	5 kN	0,63 kg
BKGRDR 15S	150 mm	2,00 mm	5 kN	0,93 kg
BKGRDR 20S	200 mm	2,00 mm	5 kN	1,25 kg
BKGRDR 30S	300 mm	2,00 mm	5 kN	2,05 kg
BKGRDR 40S	400 mm	2,00 mm	5 kN	2,99 kg
BKGRDR 50S	500 mm	2,00 mm	5 kN	4,09 kg
BKGRDR 60S	600 mm	2,00 mm	5 kN	5,35 kg

**B:** width  
**t:** material thickness  
**P<sub>max</sub>:** Maximum load  
**G:** weight

## DETAILS / APPLICATIONS



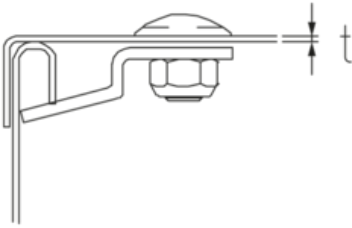

## OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

