


## BKK 110

floor duct crossing, height = 110 mm

floor duct crossing for horizontal change of direction with integrated connectors



From a width  $\geq$  300 mm, one separating strip must be installed. From a width of  $\geq$  500 mm, two separating strips must be installed.


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	t	G
BKK 110-10S	110 mm	100 mm	2,00 mm	3,60 kg
incl.: 8x KLR clamp fastening set				
BKK 110-15S	110 mm	150 mm	2,00 mm	3,87 kg
incl.: 8x KLR clamp fastening set				
BKK 110-20S	110 mm	200 mm	2,00 mm	4,44 kg
incl.: 8x KLR clamp fastening set				
BKK 110-30S	110 mm	300 mm	2,00 mm	5,51 kg
incl.: 8x KLR clamp fastening set				
BKK 110-40S	110 mm	400 mm	2,00 mm	6,97 kg
incl.: 8x KLR clamp fastening set				
BKK 110-50S	110 mm	500 mm	2,00 mm	8,73 kg
incl.: 8x KLR clamp fastening set				
BKK 110-60S	110 mm	600 mm	2,00 mm	10,82 kg
incl.: 8x KLR clamp fastening set				



**H:** height  
**B:** width  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS

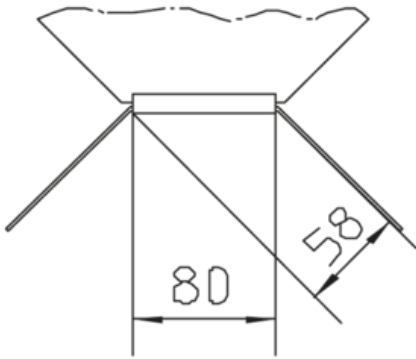

## OPTIONAL ACCESSORIES

BKKDR, BKKDR-RHP, BKKDR-WZB AL, BKRTV 110, BKDS 110

