


BKSDR

floor duct riser bend cover with turning bolts



In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	P _{max}	G
BKSDR 10S	200 mm	100 mm	200 mm	2,00 mm	5 kN	0,76 kg
BKSDR 15S	200 mm	150 mm	200 mm	2,00 mm	5 kN	1,02 kg
BKSDR 20S	200 mm	200 mm	200 mm	2,00 mm	5 kN	1,29 kg
BKSDR 30S	200 mm	300 mm	200 mm	2,00 mm	5 kN	1,82 kg
BKSDR 40S	200 mm	400 mm	200 mm	2,00 mm	5 kN	2,35 kg
BKSDR 50S	200 mm	500 mm	200 mm	2,00 mm	5 kN	2,88 kg
BKSDR 60S	200 mm	600 mm	200 mm	2,00 mm	5 kN	3,41 kg

H: height
B: width
L: length
t: material thickness
P_{max}: Maximum load
G: weight

DETAILS / APPLICATIONS



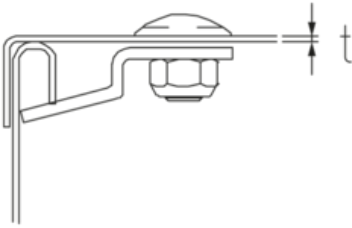

OPTIONAL ACCESSORIES

BKS 100, BKS 110

