


BKSDR-RHP

floor duct riser bend cover with non-slip embossing



Cover with non-slip embossing and turning bolts for floor duct riser bend.

The cover consists of a 2 mm thick galvanized sheet steel with 1 mm non-slip embossing and slip resistance R12 according to DIN 51130. In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	P _{max}	slip resistance class	G
BKSDR-RHP 10S	200 mm	100 mm	200 mm	2,00 mm	5 kN	R12	0,76 kg
BKSDR-RHP 15S	200 mm	150 mm	200 mm	2,00 mm	5 kN	R12	1,02 kg
BKSDR-RHP 20S	200 mm	200 mm	200 mm	2,00 mm	5 kN	R12	1,29 kg
BKSDR-RHP 30S	200 mm	300 mm	200 mm	2,00 mm	5 kN	R12	1,82 kg
BKSDR-RHP 40S	200 mm	400 mm	200 mm	2,00 mm	5 kN	R12	2,35 kg
BKSDR-RHP 50S	200 mm	500 mm	200 mm	2,00 mm	5 kN	R12	2,88 kg
BKSDR-RHP 60S	200 mm	600 mm	200 mm	2,00 mm	5 kN	R12	3,41 kg

H: height

B: width

L: length

t: material thickness


P_{max}: Maximum load

slip resistance class: slip resistance according to DIN 51130

G: weight

DETAILS / APPLICATIONS



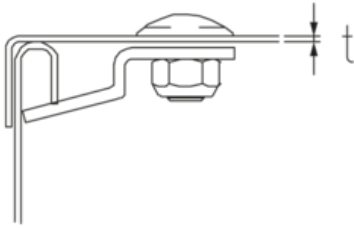

OPTIONAL ACCESSORIES

BKS 100, BKS 110

