


BKVAADR

floor duct attachment branch cover, variable with turning bolts

In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.




Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P _{max}	G
BKVAADR 10S	100 mm	2,00 mm	5 kN	0,35 kg
BKVAADR 15S	150 mm	2,00 mm	5 kN	0,49 kg
BKVAADR 20S	200 mm	2,00 mm	5 kN	0,74 kg
BKVAADR 30S	300 mm	2,00 mm	5 kN	1,22 kg
BKVAADR 40S	400 mm	2,00 mm	5 kN	1,93 kg
BKVAADR 50S	500 mm	2,00 mm	5 kN	2,82 kg
BKVAADR 60S	600 mm	2,00 mm	5 kN	3,89 kg

B: width
t: material thickness
P_{max}: Maximum load
G: weight

DETAILS / APPLICATIONS



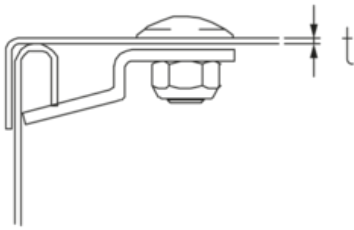

OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

