


BKVB 110

floor duct bend, variable, height = 110 mm

From a width \geq 300 mm, one separating strip must be installed. From a width of \geq 500 mm, two separating strips must be installed.




Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	t	G
BKVB 110-10S	110 mm	100 mm	2,00 mm	1,50 kg
incl.: 4x KLR	clamp fastening set			
BKVB 110-15S	110 mm	150 mm	2,00 mm	1,96 kg
incl.: 4x KLR	clamp fastening set			
BKVB 110-20S	110 mm	200 mm	2,00 mm	2,47 kg
incl.: 4x KLR	clamp fastening set			
BKVB 110-30S	110 mm	300 mm	2,00 mm	3,63 kg
incl.: 4x KLR	clamp fastening set			
BKVB 110-40S	110 mm	400 mm	2,00 mm	5,05 kg
incl.: 4x KLR	clamp fastening set			
BKVB 110-50S	110 mm	500 mm	2,00 mm	6,71 kg
incl.: 4x KLR	clamp fastening set			
BKVB 110-60S	110 mm	600 mm	2,00 mm	8,60 kg
incl.: 4x KLR	clamp fastening set			



H: height
B: width
t: material thickness
G: weight

DETAILS / APPLICATIONS

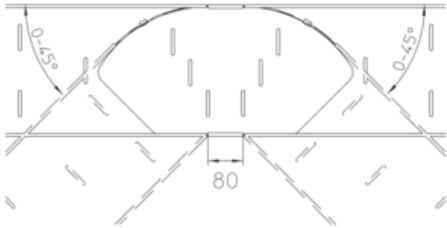

OPTIONAL ACCESSORIES

BKVBDR, BKVBDR-RHP, BKVBDR-WZB AL, BKRTV 110, BKDS 110

