


BL 6

corner angle, KHU 60

Wall angle for fastening bracket supports KHU 60 to walls.

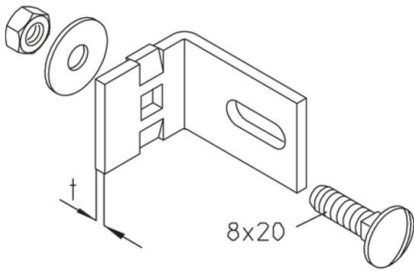

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | t | G |
|-------------|---------------------------------------|---------|
| BL 6S | 4,00 mm | 0,05 kg |
| incl.: | | |
| 1x FRS 8X20 | round-head screw with square, DIN 603 | |
| 1x SEM 8 | hexagon-nut, DIN 934 | |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | t | G |
|-------------|---------------------------------------|---------|
| BL 6F | 4,00 mm | 0,05 kg |
| incl.: | | |
| 1x FRS 8X20 | round-head screw with square, DIN 603 | |
| 1x SEM 8 | hexagon-nut, DIN 934 | |


Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | t | G |
|--------------|---------------------------------------|---------|
| BL 6E | 3,00 mm | 0,05 kg |
| incl.: | | |
| 1x FRS 8X20E | round-head screw with square, DIN 603 | |
| 1x SEM 8E | hexagon-nut, DIN 934 | |



t: material thickness
G: weight

DETAILS / APPLICATIONS

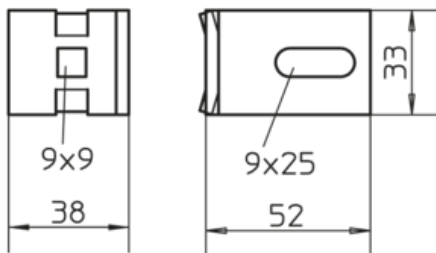

OPTIONAL ACCESSORIES

STUS 50

