

BODO N

single outlet with one floor socket and one data module, wet maintained, round

Round single outlet with floor cover protection frame. Including pivotable tube as cable outlet, cover, mounting box with strain-relief, claw set and rubber seal. For installation in floor sockets and raised or hollow space floor openings. Equipped with an isolated ground receptacle of 45x45 mm and an RJ45 data socket of 22,5x45 mm (Legrand type Cat. 6A STP RJ45, 76573). Suitable for rooms with dry and wet-cleaned floor covers. Designed for high traffic loads.

Please mind the technical information in chapter planning.



material	Tube, cover and tube collet: aluminium or stainless steel / frame and mounting box: plastic material
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	wet floor cleaning
protection class	in use IP 22 / in use with rubber sleeve UGM1-3 IP 43 / not in use IP 66
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 130 mm: 15 kN

Aluminium

Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
BODO N	122 mm	87 mm	140 mm	122 mm	15 kN	aluminum	IP 66	IP 43	0,73 kg
incl.:									
1x UET80-R-WD			tube						
1x UETD80-R-WD			tube cover						
1x UDAE22-CAT6 8			data systems installation device, single, 22,5x45 mm						
1x UST45-W 1			shockproof socket, single						
1x UTG 75			device separation plate						
1x UARM-3-1 118			cover plate for 3x UDAE22						
1x UG-R			mounting box, round						
2x UGM1-3			rubber sleeve						
1x UWZ-IS 8			Allen wrench						
BODO N-SW	122 mm	87 mm	140 mm	122 mm	15 kN	black	IP 66	IP 43	0,73 kg



Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
incl.:									
1x UET80-R-WD						tube			
1x UETD80-R-WD						tube cover			
1x UDAE22-CAT6 8						data systems installation device, single, 22,5x45 mm			
1x UST45-W 1						shockproof socket, single			
1x UTG 75						device separation plate			
1x UARM-3-1 118						cover plate for 3x UDAE22			
1x UG-R						mounting box, round			
2x UGM1-3						rubber sleeve			
1x UWZ-IS 8						Allen wrench			
BODO N-CR	122 mm	87 mm	140 mm	122 mm	15 kN	chrome	IP 66	IP 43	0,73 kg
incl.:									
1x UET80-R-WD						tube			
1x UETD80-R-WD						tube cover			
1x UDAE22-CAT6 8						data systems installation device, single, 22,5x45 mm			
1x UST45-W 1						shockproof socket, single			
1x UTG 75						device separation plate			
1x UARM-3-1 118						cover plate for 3x UDAE22			
1x UG-R						mounting box, round			
2x UGM1-3						rubber sleeve			
1x UWZ-IS 8						Allen wrench			

Brass

Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
BODO N-MMS	122 mm	87 mm	140 mm	122 mm	15 kN	brass, solid	IP 66	IP 43	1,51 kg
incl.:									
1x UET80-R-WD						tube			
1x UETD80-R-WD						tube cover			
1x UDAE22-CAT6 8						data systems installation device, single, 22,5x45 mm			
1x UST45-W 1						shockproof socket, single			
1x UTG 75						device separation plate			
1x UARM-3-1 118						cover plate for 3x UDAE22			
1x UG-R						mounting box, round			
2x UGM1-3						rubber sleeve			
1x UWZ-IS 8						Allen wrench			

Stainless steel, according to ASTM 304 / BS 304 S 3


Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
BODO N-E	122 mm	87 mm	140 mm	122 mm	15 kN	Stainless steel, solid	IP 66	IP 43	1,46 kg



Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
incl.:									
1x UET80-R-WD									
1x UETD80-R-WD									
1x UDAE22-CAT6 8									
1x UST45-W 1									
1x UTG 75									
1x UARM-3-1 118									
1x UG-R									
2x UGM1-3									
1x UWZ-IS 8									

H: height
H_{min}: Minimum installation height
B: width
E: fitting dimension
P_{max}: Maximum load
color:
IP_n: IP protection level in unused condition
IP_g: IP protection level in used condition
G: weight

DETAILS / APPLICATIONS

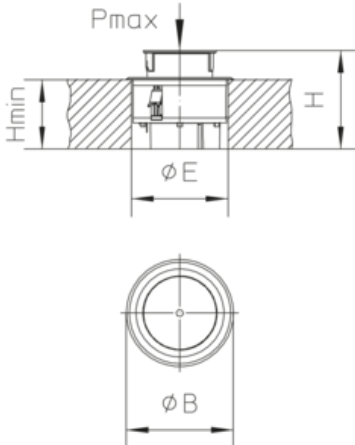

OPTIONAL ACCESSORIES

USK R122, UDKS 20-50, UBDHB 122R





wet-cleaned



Electrical and electronic equipment must not be disposed off via the household waste.

