


BODO TL

single-outlet, dry maintained, round, empty

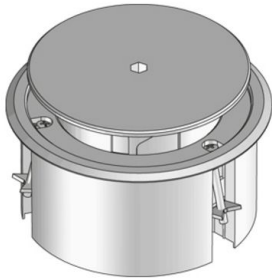

Round single-outlet made of plastic with floor cover protection frame including a pivotable cover with cable outlet and a set of claws. For the installation into screed and raised floor/hollow floor openings. Suitable for rooms with dry-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



| | |
|------------------|--|
| material | Cover with cable outlet and frame: polyamide |
| type of assembly | Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor |
| application area | dry floor cleaning |
| protection class | in use IP 20 / not in use IP 30 |
| norm | according to DIN EN 50085 |
| permits | according to VDE / TÜV |
| loading | including inspection stamp \varnothing 13 mm: 1.5 kN |

Acrylonitrile-butadiene-styrene copolymer

| Product | H | H _{min} | B | E | P _{max} | color | IP _n | IP _g | G |
|-----------|-------|------------------|--------|--------|------------------|---------------------------|-----------------|-----------------|---------|
| BODO TL-G | 87 mm | 63 mm | 133 mm | 122 mm | 1,5 kN | RAL 7011 (iron grey) | IP 30 | IP 20 | 0,20 kg |
| BODO TL-S | 87 mm | 63 mm | 133 mm | 122 mm | 1,5 kN | RAL 9011 (graphite black) | IP 30 | IP 20 | 0,20 kg |

H: height

H_{min}: Minimum installation height

B: width

E: fitting dimension

P_{max}: Maximum load

color:


IP_n: IP protection level in unused condition

IP_g: IP protection level in used condition

G: weight



DETAILS / APPLICATIONS

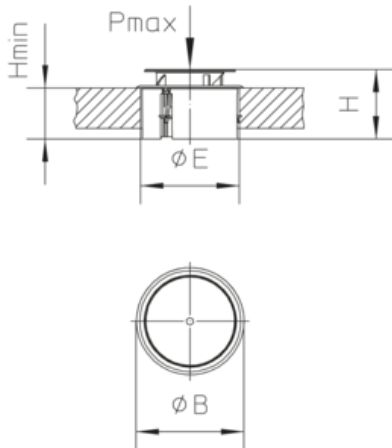

OPTIONAL ACCESSORIES

UG R, UTG 75, UARM-2-1, UARM-3-1, USK R122, UBDHB 122R, UWZ IS



dry-cleaned

