


BS

drilling screw, DIN 7504 form M (N) – Lens head Torx

Drilling screw with drill point for connecting steel sheets without pilot hole

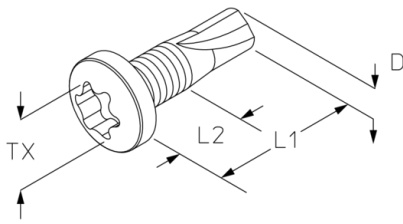

BS 4.2X13 with drive size T20, usable thread length 4,3 mm

BS 5.5X19 with drive size T25, usable thread length 8,0 mm

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

| Product | L1 | L2 | TX | D | G |
|-------------|-------|--------|-----|--------|-------------|
| BS 4.2X13GV | 13 mm | 4,3 mm | T20 | 4,2 mm | 0,15 kg/100 |
| BS 5.5X19GV | 19 mm | 8,0 mm | T25 | 5,5 mm | 0,35 kg/100 |

L1: length 1
L2: length 2
TX: Torx
D: diameter
G: weight

OPTIONAL ACCESSORIES

TBK

