


DSAHF8 3

wire suspension with threaded end M8 and universal closure

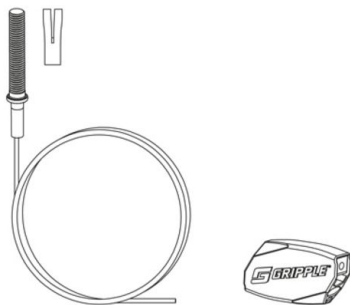

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	L	P_{max}	G
DSAHF8 31GV	1000 mm	0,88 kN	0,10 kg
DSAHF8 32GV	2000 mm	0,88 kN	0,14 kg
DSAHF8 33GV	3000 mm	0,88 kN	0,18 kg
DSAHF8 34GV	4000 mm	0,88 kN	0,22 kg
DSAHF8 35GV	5000 mm	0,88 kN	0,26 kg
DSAHF8 310GV	10000 mm	0,88 kN	0,42 kg

L: length

P_{max} : Maximum load

:

G: weight

