


DSAFFFFR 3

wire suspension with loop and universal closure

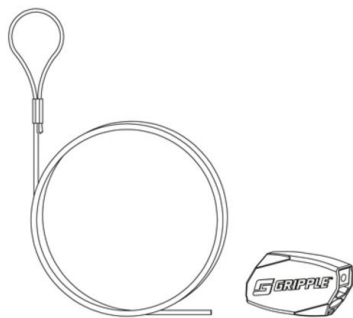

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	L	P _{max}	G
DSAFFFFR 31GV	1000 mm	0,88 kN	0,08 kg
DSAFFFFR 32GV	2000 mm	0,88 kN	0,12 kg
DSAFFFFR 33GV	3000 mm	0,88 kN	0,16 kg
DSAFFFFR 34GV	4000 mm	0,88 kN	0,18 kg
DSAFFFFR 35GV	5000 mm	0,88 kN	0,22 kg
DSAFFFFR 310GV	10000 mm	0,88 kN	0,39 kg

L: length

P_{max}: Maximum load

:

G: weight

