


## DSAFFR 4

wire suspension with loop and universal closure

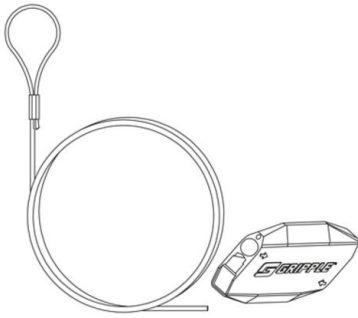

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	L	P <sub>max</sub>	G
DSAFFR 41GV	1000 mm	2,21 kN	0,22 kg
DSAFFR 42GV	2000 mm	2,21 kN	0,29 kg
DSAFFR 43GV	3000 mm	2,21 kN	0,39 kg
DSAFFR 44GV	4000 mm	2,21 kN	0,45 kg
DSAFFR 45GV	5000 mm	2,21 kN	0,61 kg
DSAFFR 410GV	10000 mm	2,21 kN	1,09 kg

**L:** length

**P<sub>max</sub>:** Maximum load

:

**G:** weight

