


## DSAFFFFR 5

wire suspension with loop and universal closure

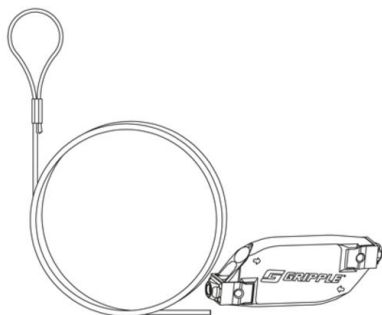

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	L	P <sub>max</sub>	G
DSAFFFFR 51GV	1000 mm	3,19 kN	0,4 kg
DSAFFFFR 52GV	2000 mm	3,19 kN	0,7 kg
DSAFFFFR 53GV	3000 mm	3,19 kN	0,73 kg
DSAFFFFR 54GV	4000 mm	3,19 kN	0,89 kg
DSAFFFFR 55GV	5000 mm	3,19 kN	1,08 kg
DSAFFFFR 510GV	10000 mm	3,19 kN	1,88 kg

**L:** length

**P<sub>max</sub>:** Maximum load

:

**G:** weight

