


DSAHFSP 3

wire suspension with cross anchor and universal closure

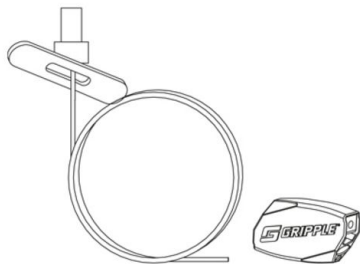

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	L	P _{max}	G
DSAHFSP 31GV	1000 mm	0,88 kN	0,08 kg
DSAHFSP 32GV	2000 mm	0,88 kN	0,12 kg
DSAHFSP 33GV	3000 mm	0,88 kN	0,15 kg
DSAHFSP 34GV	4000 mm	0,88 kN	0,20 kg
DSAHFSP 35GV	5000 mm	0,88 kN	0,23 kg
DSAHFSP 310GV	10000 mm	0,88 kN	0,43 kg

L: length

P_{max}: Maximum load

:

G: weight

