


## GD-SW

storm protection angle - mesh cable tray

protection angle for additional securing of mesh cable tray covers especially in outdoor use

Storm protection angles, suitable for outdoor use. According to assembly instructions you should use at least 6 safety elements for each 3 meters cable path cover.

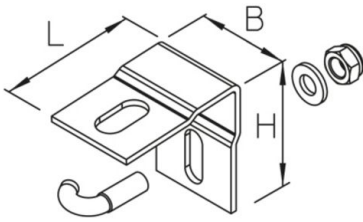

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
GD-SW F	33 mm	25 mm	20 mm	0,07 kg
incl.:				
1x SEMSS 6E	hexagon-nut, self-locking, DIN 985			
1x GH 6X24E	fastening hooks			

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
GD-SW E	33 mm	25 mm	20 mm	0,07 kg
incl.:				
1x SEMSS 6E	hexagon-nut, self-locking, DIN 985			
1x GH 6X24E	fastening hooks			

**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS



